




 **GODKENDT
TIL DRIKKEVAND**

vola®




5 705230 286211

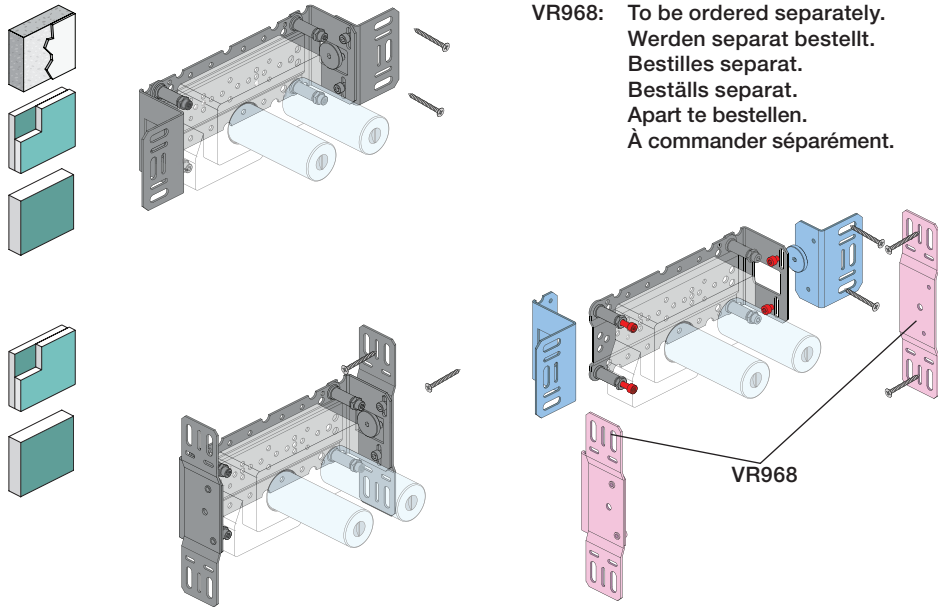

VR968


 Max. 65°C, 150°F

g. 



200M

PEX1

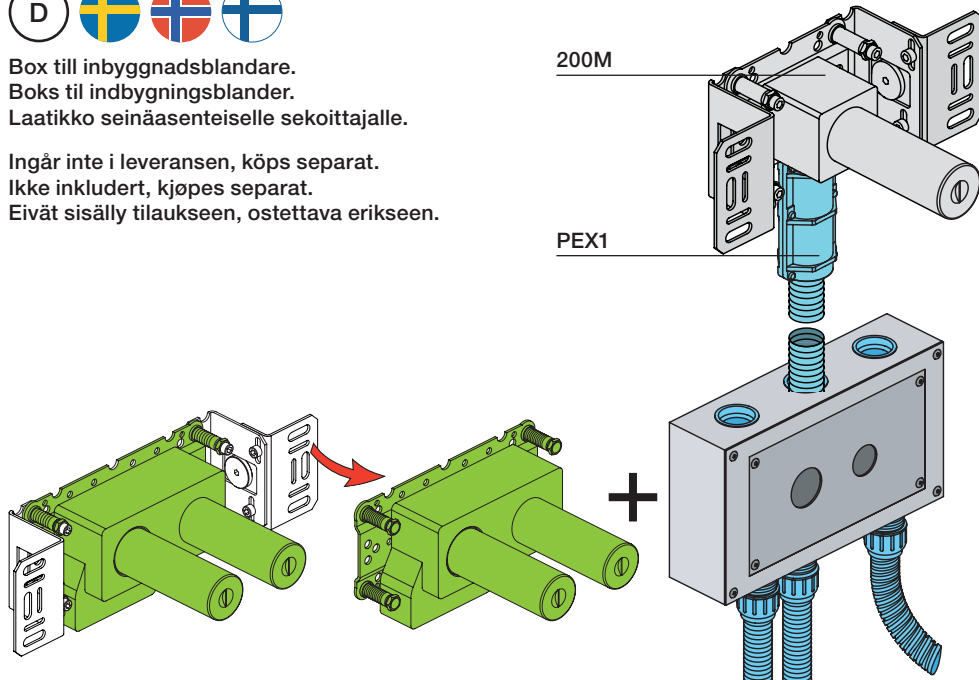

VR1260

VR2260


A diagram showing a standard extension card with a ruler below it. The card is divided into sections: a green 'STANDARD' section, a yellow 'EXTENSION' section with values +10, +20, +30, +40, and +50, and a red 'DO NOT REMOVE' section. A dimension line labeled 'Y' indicates the total length of the extension card. A ruler below shows the card's position relative to a 10 cm scale.

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

VR1260+


VR2260+

VR2019+, VR2119+

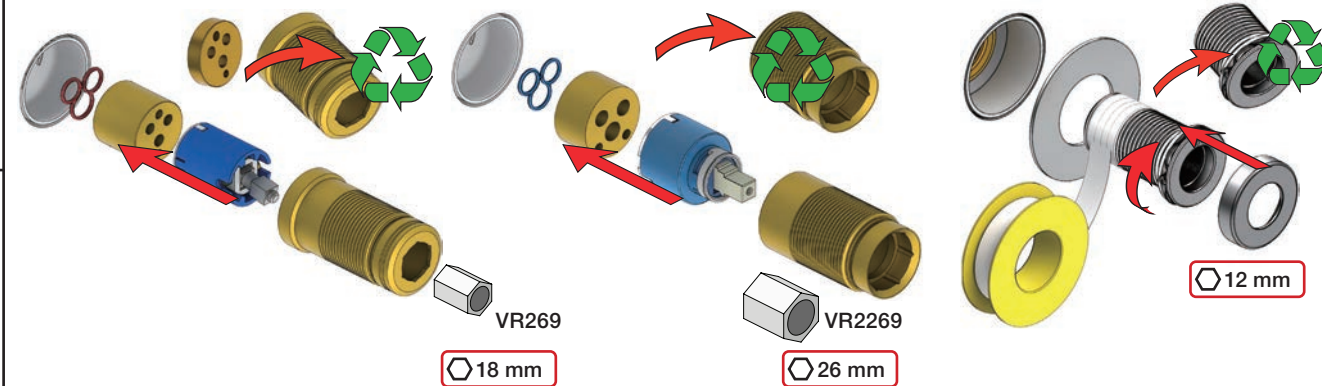

VR1400+

400-2400

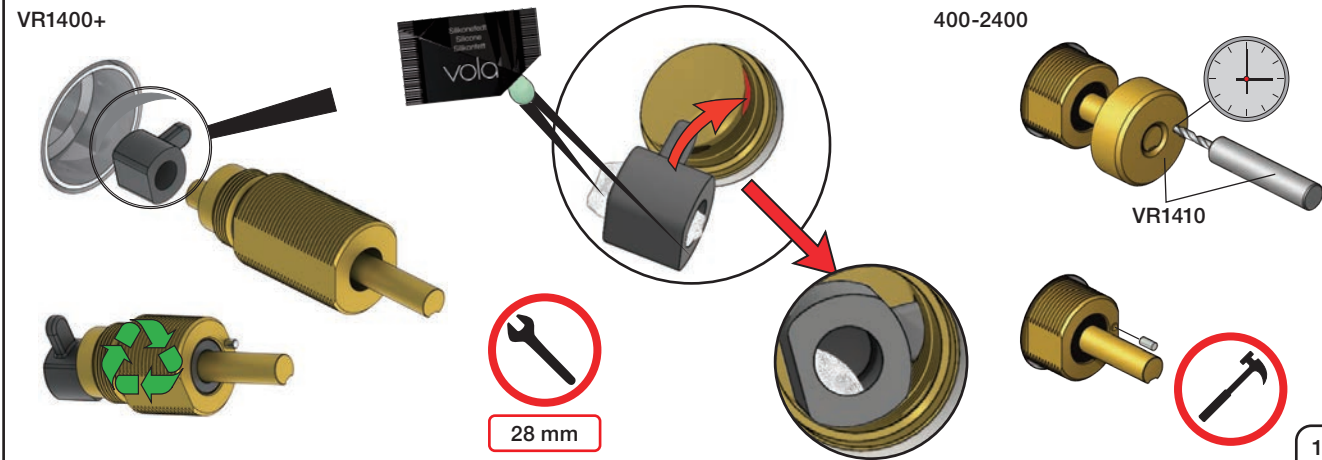

1



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

2x13 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



Masonry
Mauerwerk
Murværk

Murverk
Massive wand
Mur Plein



2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera den lokala lagstiftning.
Verifieer de lokale regelgeving.
Vérifiez la législation locale.

1. MAX. 16 Bar 232 Psi

2. MAX. 4 Bar 58 Psi

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !



Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage




T60:



T68:



T65:

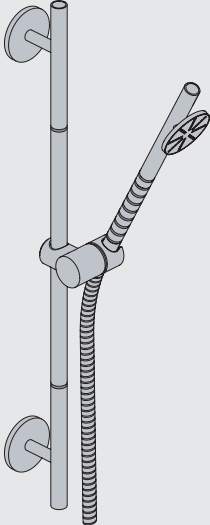

1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

28 mm
1 1/8"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1

Max. 65°C. 150°F

Service - VR556

USA:

Max. flow rate:
1.6 Gal/min
6.0 l/min.

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

Ø6 mm
1/4"

25 mm
1"

001G

SILICONE

Min. 200 mm
Min. 8"

Min. 350 mm
Min. 14"

40 mm
1 5/8"

070

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"



800 mm
31 1/2"

700 mm
27 1/2"




600 mm
23 5/8"

1




4

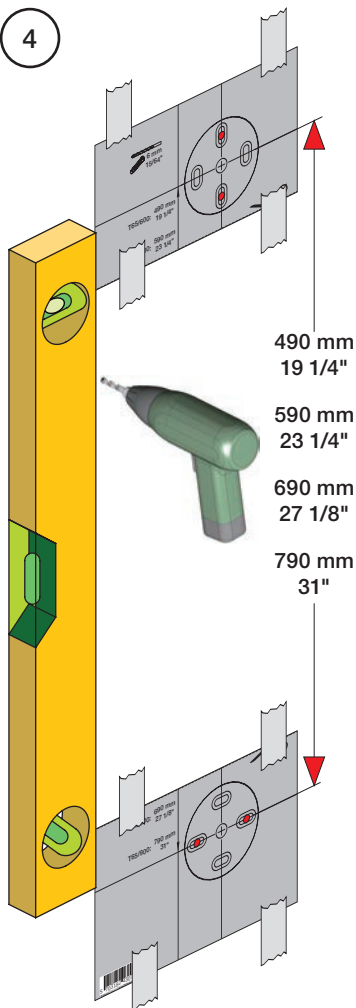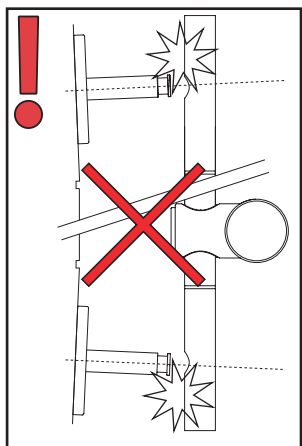490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

5

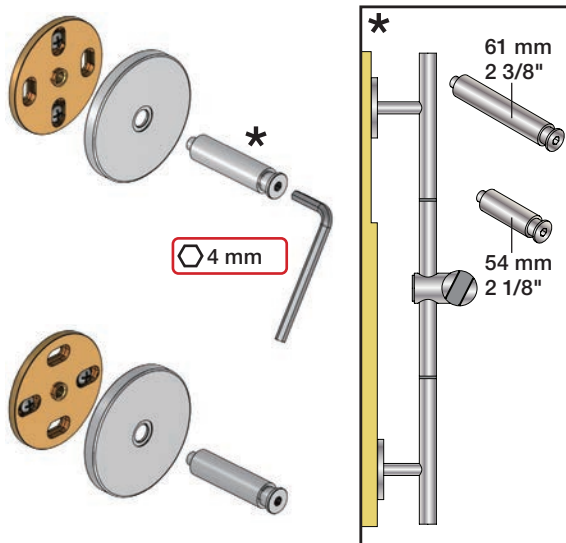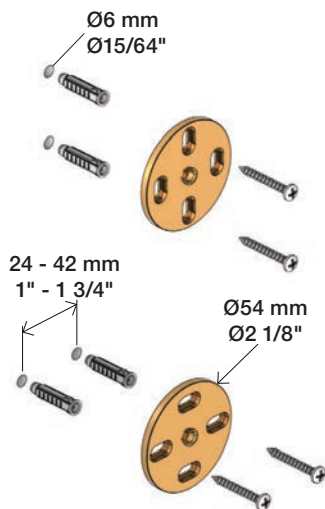

6

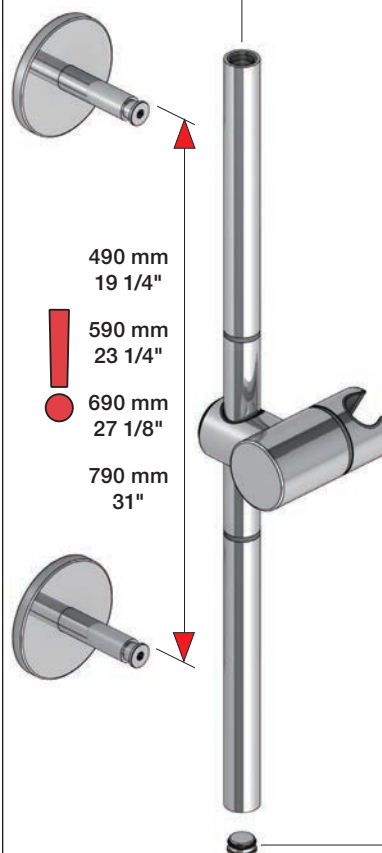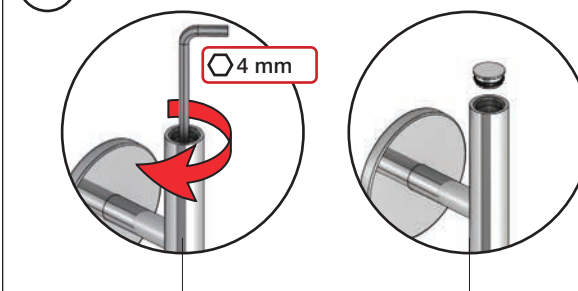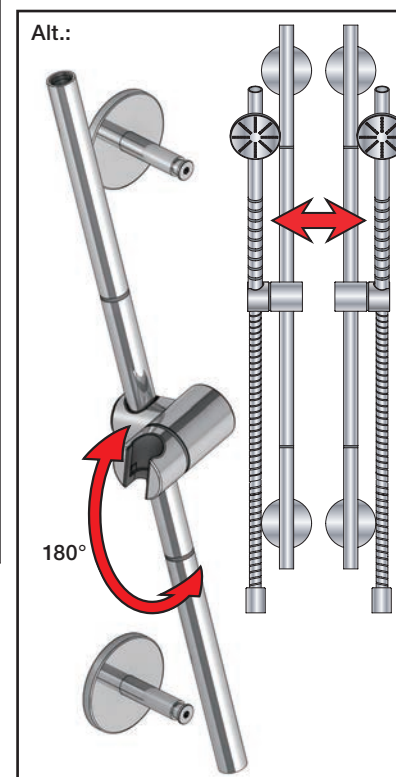490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"



7



8



Do not cut the membrane
 Die Membran nicht schneiden
 Skær ikke membranen
 * Skär inte membranet
 Snij het membraan niet door
 Ne coupez pas la membrane
 No cortar la membrana



*Membran används inte i SVERIGE,
 ihop med inbyggboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
 Verlängerung
 Forlængelse
 Anpassung
 Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279

VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50



VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50


NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"

NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

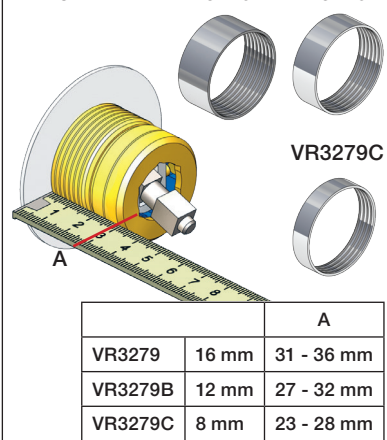


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

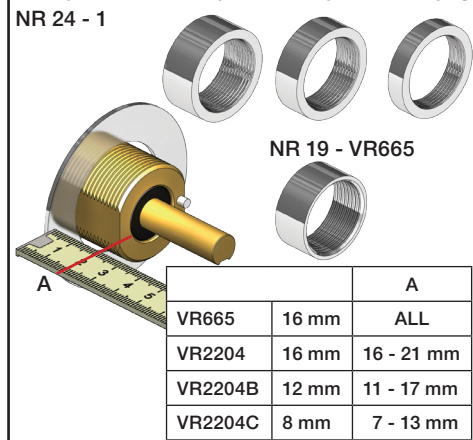


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

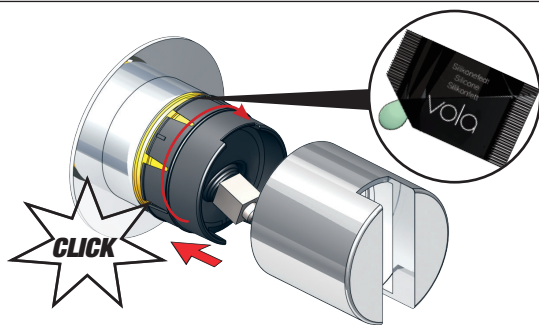

NR 28 - 4



NR 19 - 2 NR 24 - 2

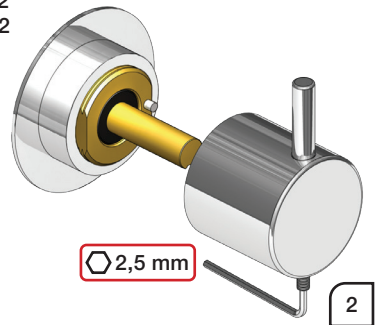


2100




NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
 VR1277K: VR22, VR1277, VR2269


2100





2100X




2200V




2300



2002




2003KB



2003B

-



2002



2001, 001



2001, 001



2001



2001, 001



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 2100
 2100X, 2200V, 2300

Date
 May. 22

Rev.
 4

Sheet
 SB 10.7

