

VOLA Electronic

Elektronikboks

Valve box

Ventil Kasten

Ventilbox


Ventiel doos

Boite étanche avec vanne




EU EMC directive
2004/108/EU
IPX4

VR2618



VR2617



www.vola.com

mnt_Elektronikbox_V10_40999840
17-03-2022

© VOLA A/S




vola

Settings: Einstellung:	Setting: Justering:	Afstelling: Réglage:			
	Sec.	1	2	3	4
DEFAULT SETTING:		ON	ON	ON	ON
ON	0	ON	ON	ON	ON = 20 sec. - hygienic rinse every 24h. - hygienische spülung jede 24 stunde. - hygiejneskyl 24t efter sidste brug. - hygienisk skölja varje 24 timmar. - hygiénisch spoelen iedere 24 uur. - Rinçage hygiénique chaque 24h.
OFF	3	ON	OFF	ON	
	5	ON	OFF	OFF	
	8	OFF	ON	ON	
	10	OFF	ON	OFF	
	15	OFF	OFF	ON	
	20	OFF	OFF	OFF	
SPECIAL: Long spout Lange Auslauf Langt udløb Långt utlopp Lange uitloop Long bec	*0	ON	ON	OFF	


installation requirements:
Installationsanforderungen:

Sunlight or light from halogen lamps can shorten the signal range.
Sonnenlicht oder Licht von Halogenlampen können das Signal verkürzen.
Skarpt sollys eller halogenlys, kan forkorte rækkevidden.
Starkt sollys eller halogenbelysning kan forkorta signalen/känsligheten.
Directe lichtinval van de zon of van halogeen lampen kan het signaal verkorten.
La lumière du soleil ou des lampes à halogène peut perturber le fonctionnement du détecteur.




Krav til installation:
Installationskrav:

No mirroring surfaces opposite the sensor.
Keine spiegelnden Flächen vor dem Sensor.
Ingen reflekterende overflader modsat sensoren.
Inga speglade ytor motsatta sensorn.
Geen spiegelen oppervlakken tegenover de sensor.
Pas de surfaces réfléchissantes opposées du capteur.



Adapter/ Adapteur VR2624 & VR2636

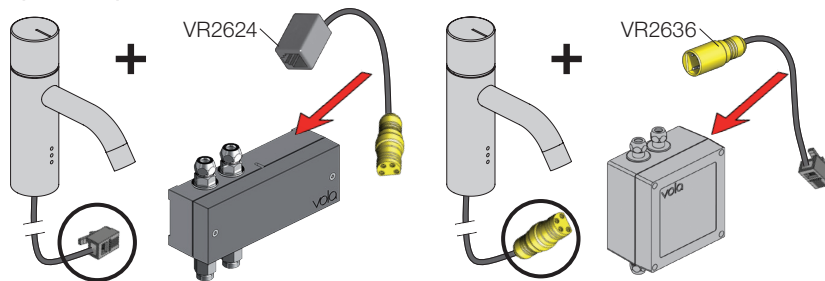

DC Power supply
DC Stromversorgung
DC strømforsyning
DC Nätaggregat

VR2622: ROW & GB
VR2626: EU
VR2623, IPX5:
VR2622/VR2626:

110 - 230V~/50-60Hz
9V~/300 mA
100 - 240V~/50-60Hz/130mA
9V~/660 mA
VR2623, IP64:

DC voeding
Alimentation électrique


VR2622-VR2623-VR2626
VR2624-VR2636:
 To be ordered separately
 Separat bestillen
 Bestilles særskilt
 Beställas separat
 Apart te bestellen
 À commander séparément

Battery operation
Batteriebetrieb
Batteridrift
Batterij bedrijf
Fonctionnement sur batterie


2 x 1.5V AA - FR6 - FR6

Batteries **MUST be removed if operated by Power supply.**
Batterien **MÜSSEN bei Stromversorgung entfernt werden.**
Batterierne **SKAL fjernes ved brug af strømforsyning.**
Batterier **SKAL tas bort om der anvendes nätaggregat.**
Batterijen **MOETEN worden verwijderd als ze op netvoeding werken.**
Les piles **DOIVENT être impérativement retirées si on utilise l'alimentation électrique.**


VR2618

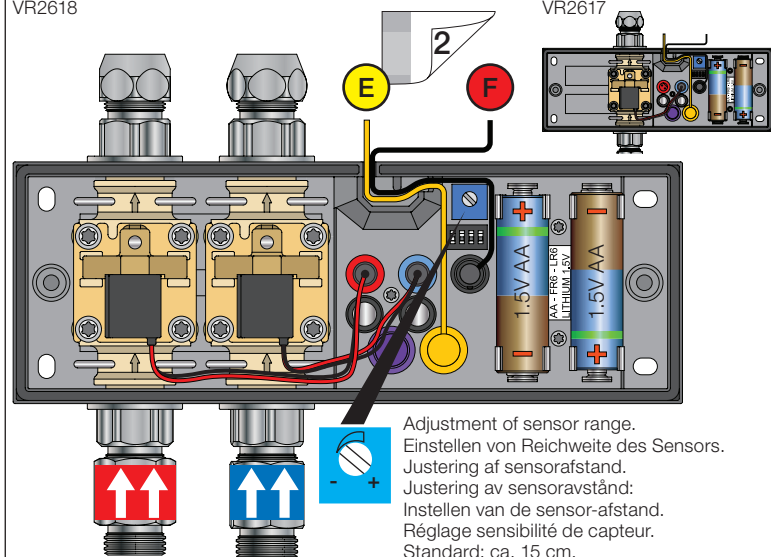



Adjustment of sensor range.
Einstellen von Reichweite des Sensors.
Justering af sensorafstand.
Justering av sensoravstånd:
Instellen van de sensor-afstand.
Réglage sensibilité de capteur.
Standard: ca. 15 cm.

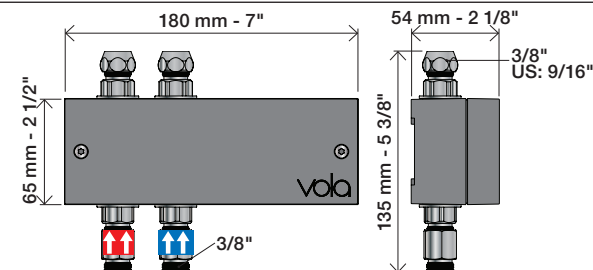


Takmonterad
Plafondmontage
Monté au plafond

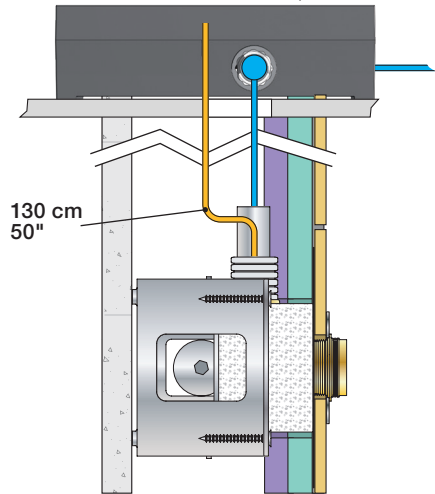

This technical drawing shows a side view of a wall-mounted gas valve assembly. The assembly consists of a main valve body mounted on a wall, with a pressure gauge connected to its side. A gas line enters the valve from the bottom. Two electrical wires, one blue and one yellow, run from the valve to a separate electrical control box mounted on the wall. The drawing includes dimension lines and labels for various components and measurements.

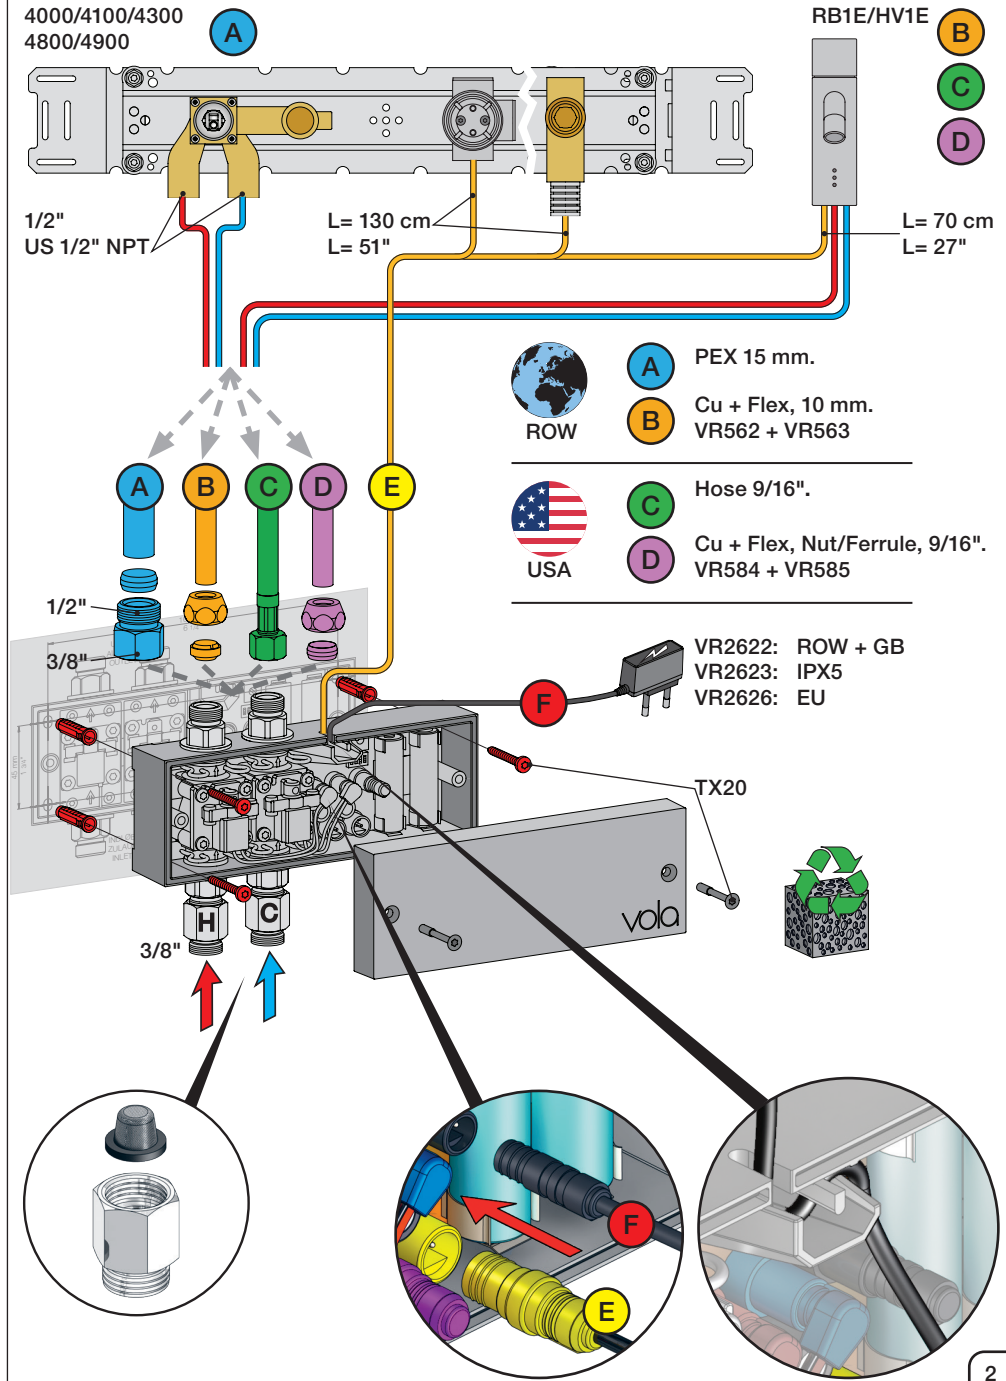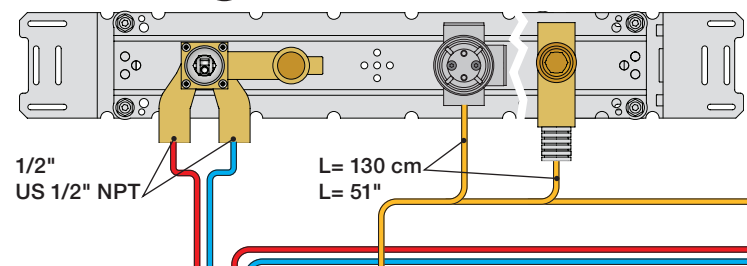

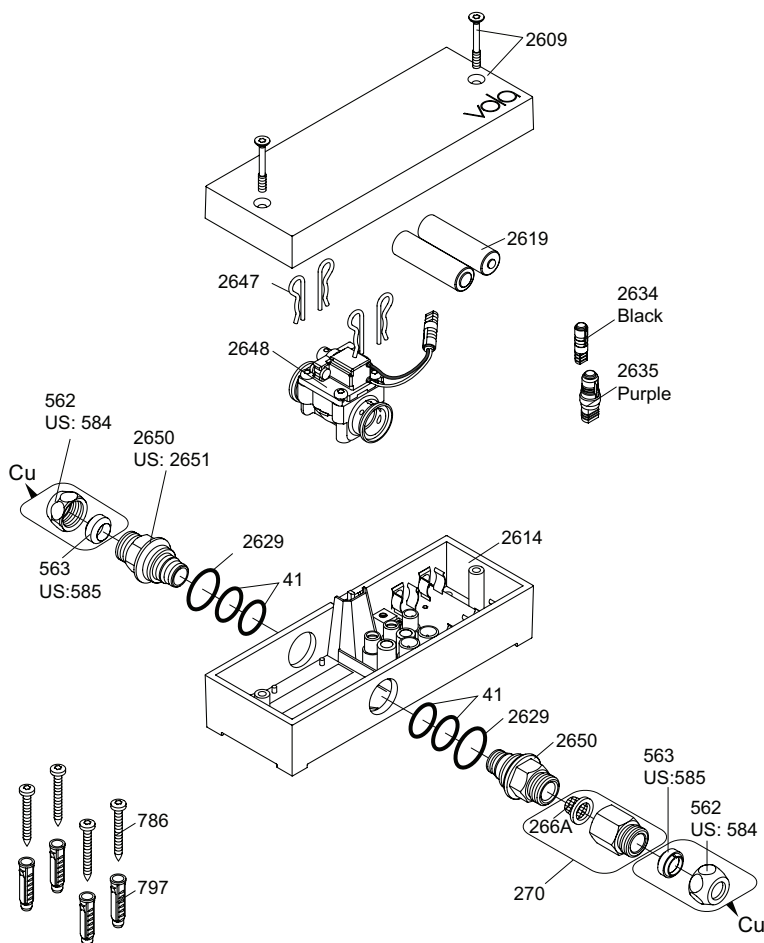

VR2650: 2xVR41, VR2652, VR2629
 VR2651: 2xVR41, VR2652, VR2629 (USA)
 VR2654: 4xVR2647, VR2648, 2xVR2650, 2xVR266A

Additional parts Zusätzliche Teile Supplerende dele Ytterligare delar

Extra onderdelen Pièces supplémentaires Las piezas adicionales

Remote control
Fernbedienung
Fjernbetjening
Fjärrkontroll

Afstandsbediening
Contrôle à distance
Telemando

2625




Power supply
Netzteil
Strømforsyning
Strömförsörjning

Stroomvoorziening
Alimentation
Convertidor adaptador



2622: ROW&GB
2626: EU

	EU	GB	US	AUS
Type:	C	G	A	I



2623: IPX5

Extension

2639 - 5 m
2645 - 10 m



Black
Schwarz
Sort

Svart
Zwart
Noir


Signal cable
Signalkabel

Signaalkabel
Câble de signal
Cable de señal



41XX, 49XX:


509 - 1.5 m
509A - 5 m
509B - 10 m




RB1E, HV1E:
2656 - 1.5 m




247



US: 2601\$







Cu: 221:
Ø10 mm



Adapter
Adapteur

Discontinued model
aufgehörte Modell
Udgået model
Avvecklad modell
Beëindigde model
Modèle discontinué



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

**VOLA VR2617
 RB1E/4300/4300/4800**

Date:
Feb. 23

Rev.:
2

Sheet:
SB21.16