

Dato:

Kunde:

Projekt:

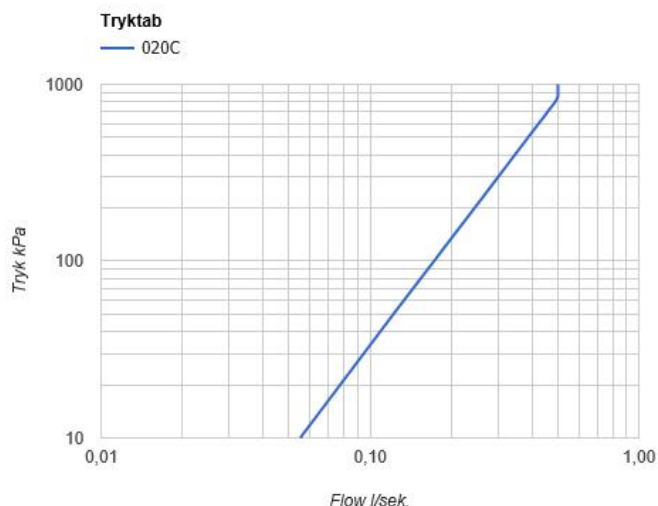


2121C

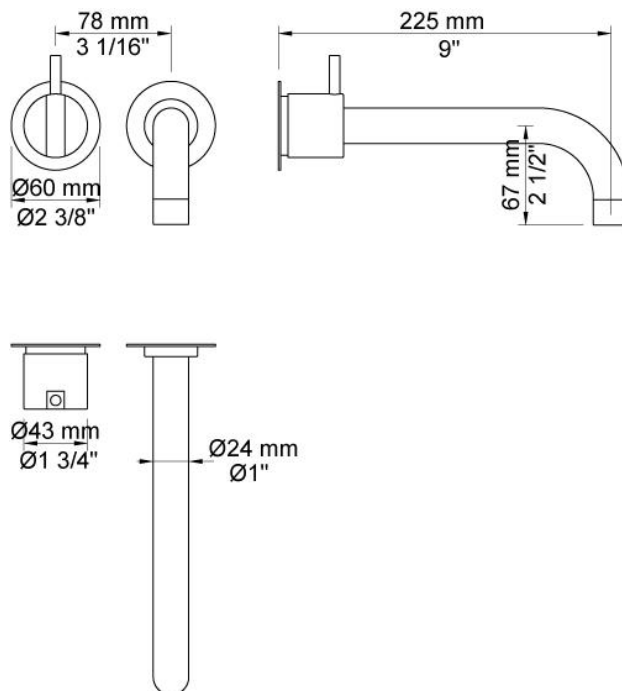
Et-grebsblander med fast tud. 2121CUP = Et-grebsblander med keramisk ventilenhed 2100. 2121CAP = Greb NR21, 225 mm fast tud 020C, 60 mm dækroset 001, 2001.VVS nr. 717715700, farve 16 krom.

Flow

	Bar:	1,0	2,0	3,0	4,0	5,0
020C	(l/min)	10,4	14,7	18,0	20,8	23,2

**Beskrivelse og tekniske data**

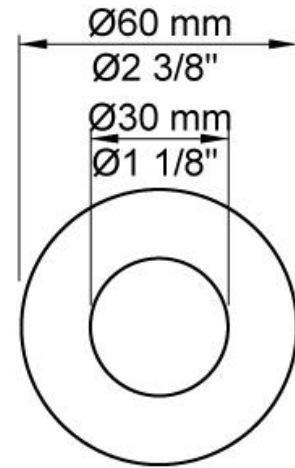
Montering	Armaturet kan bestilles med 15 mm CU rør påloddet tilgange for installation på cu-rørs installationer. Armaturet kan tilsluttes med medleveret ½" - 15 mm kompressionskoblinger og lekagesikringsboks til PEX-rør
Støjgruppe	Støjgruppe 2
Forudsat vandstrøm	0,30
Trykgruppe	Gruppe 300 kPa (Tryktabet over armaturet ved den forudsatte vandstrøm er mellem 150 og 300 kPa)

**Leveres i farverne**


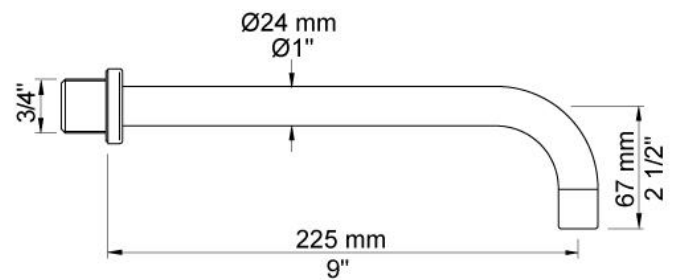
Farve 02, Grå	Farve 21, Mørkerød
Farve 04, Blå	Farve 25, Pink
Farve 05, Orange	Farve 27, Mat-sort
Farve 06, Lysegrøn	Farve 28, Mat-hvid
Farve 08, Gul	Farve 40, Børstet Rustfrit stål
Farve 09, Koksgrå	Farve 60, Sort
Farve 12, Mokka	Farve 61, Børstet sort
Farve 14, Orange-rød	Farve 62, Dyb sort
Farve 15, Mørkeblå	Farve 63, Kobber
Farve 16, Krom	Farve 64, Børstet kobber
Farve 17, Blank sort	Farve 65, Guld
Farve 18, Hvid	Farve 68, Sølv
Farve 19, Messing natur	Farve 70, Børstet guld
Farve 20, Børstet krom	

**001**

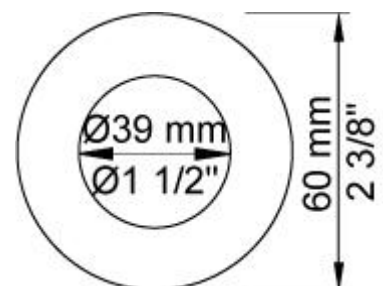
60 mm dækroset. Hul Ø30 mm.VVS nr. 727646000, farve 16 krom.VVS nr. 727646081, farve 20 børstet krom.VVS nr. 727646040, farve 40 rustfrit stål.

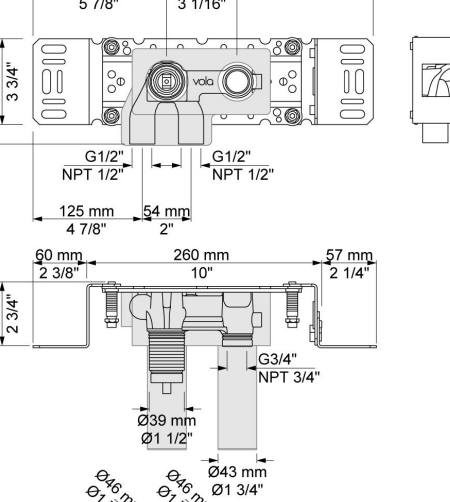
**020C**

225 mm fast tud, stor vandmængde Ø24 mm.VVS nr. 727630700, farve 16 krom.VVS nr. 727630781, farve 20 børstet krom.VVS nr. 727630740, farve 40 rustfrit stål.

**2001**

60 mm dækroset. Hul Ø39 mm.VVS nr. 727646100, farve 16 krom.VVS nr. 727646181, farve 20 børstet krom.VVS nr. 727646140, farve 40 rustfrit stål.





Technical drawings of the 1000 Series 1/2" valve, showing front, side, and top views with dimensions in millimeters and inches.

Front View Dimensions:

- Overall width: 377 mm (14 3/4")
- Distance from left face to centerline: 148 mm (5 7/8")
- Distance from centerline to right face: 78 mm (3 1/16")
- Overall height: 120 mm (4 3/4")
- Distance from top face to centerline: 95 mm (3 3/4")
- Port size: G1/2" NPT 1/2"
- Distance from left face to port centerline: 125 mm (4 7/8")
- Distance from port centerline to right face: 54 mm (2")

Side View Dimensions:

- Overall height: 70 mm (2 3/4")
- Distance from left face to centerline: 60 mm (2 3/8")
- Distance from centerline to right face: 260 mm (10")
- Distance from right face to end of valve: 57 mm (2 1/4")
- Port size: G3/4" NPT 3/4"

Top View Dimensions:

- Distance from left face to centerline: Ø39 mm (Ø1 1/2")
- Distance from centerline to right face: Ø43 mm (Ø1 3/4")
- Distance from left face to port centerline: Ø46 mm (Ø1 7/8")
- Distance from port centerline to right face: Ø46 mm (Ø1 7/8")

Accessories:

- A side view of the valve showing the handle and actuator.
- A detail view of the handle and actuator assembly.



Greb til 2100, 2200, 2300, 2400. VVS nr. 715144100, farve 16 krom.VVS nr. 715144181, farve 20 børstet krom.VVS nr. 715144140, farve 40 rustfrit stål.

