

	Dato:
	Kunde:
	Projekt:



CE



4911VSX

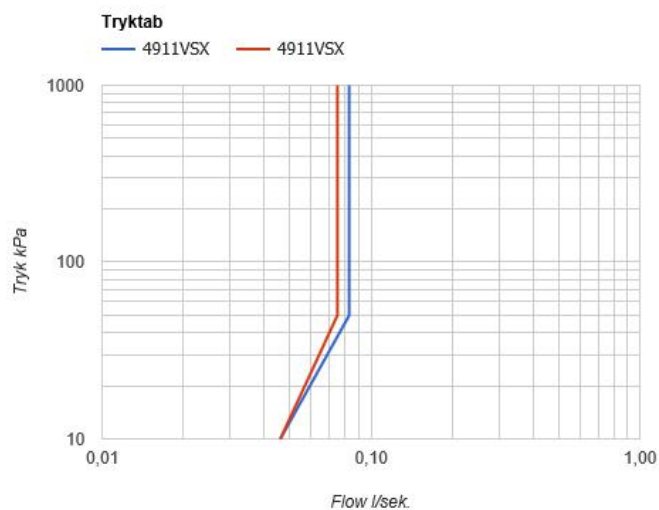
Indbygningsblander til berøringsfri betjening. Sensor plan med væg.
 4911VSXUP = Indbygningsblander til berøringsfri betjening 4900VSX med greb til højre, sensor kabel VR509. 4911VSXAP = Greb NR41, 160 mm fast tud 010, sensor VR510 plan med væg, 60 mm dækrosetter 001, 3001, VR512. Elektronikbox VR2618 medleveres.

Handicapvenlig.

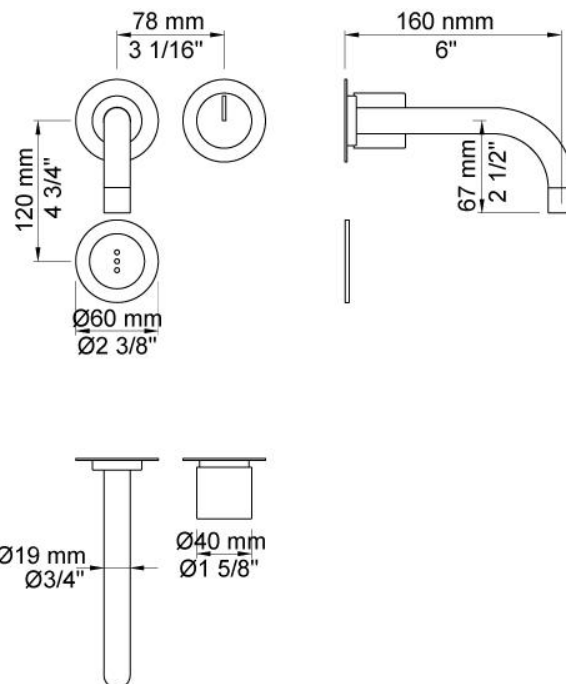
Flow

	Bar:	1,0	2,0	3,0	4,0	5,0
4911VSX	(l/min)	2,9	4,1	5,0	5,0	5,0
4911VSX ¹⁾	(l/min)	2,6	3,7	4,5	4,5	4,5

¹⁾ USA Standard

**Beskrivelse og tekniske data**

Montering	Elektronikboks 3/8" - Armatur 1/2"
Støjgruppe	Støjgruppe 1
Forudsat vandstrøm	0,10
Trykgruppe	Gruppe 300 kPa (Tryktabet over armaturet ved den forudsatte vandstrøm er mellem 150 og 300 kPa)

**Leveres i farverne**

Farve 02, Grå	Farve 21, Mørkerød
Farve 04, Blå	Farve 25, Pink
Farve 05, Orange	Farve 27, Mat-sort
Farve 06, Lysegrøn	Farve 28, Mat-hvid
Farve 08, Gul	Farve 40, Børstet Rustfrit stål
Farve 09, Koksgrå	Farve 60, Sort
Farve 12, Mokka	Farve 61, Børstet sort
Farve 14, Orange-rød	Farve 62, Dyb sort
Farve 15, Mørkeblå	Farve 63, Kobber
Farve 16, Krom	Farve 64, Børstet kobber
Farve 17, Blank sort	Farve 65, Guld
Farve 18, Hvid	Farve 68, Sølv
Farve 19, Messing natur	Farve 70, Børstet guld
Farve 20, Børstet krom	



Technical drawing of the 3000 Series Hydraulic Hose End Fitting, showing front, side, and detail views with dimensions in mm and inches.

Front View Dimensions:

- Overall Height: 214 mm (8 1/4")
- Top Flange Thickness: 30 mm (1 3/16")
- Flange Width: 148 mm (5 7/8")
- Flange Hole Diameter: 14 3/4"
- Flange Hole Spacing: 78 mm (3 1/16")
- Body Height: 95 mm (3 3/4")
- Body Width: 199 mm (7 7/8")
- Body Hole Diameter: 54 mm (2 1/8")
- Body Hole Spacing: 54 mm (2 1/8")
- Body Hole Spacing: 10"
- Body Hole Spacing: 57 mm (2 1/4")

Side View Dimensions:

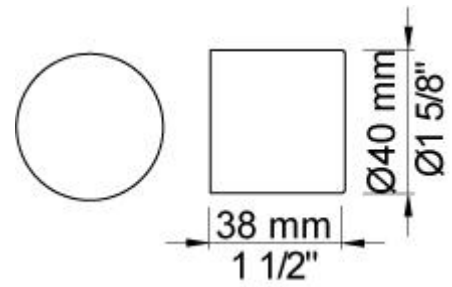
- Overall Width: 120 mm (4 3/4")
- Flange Thickness: 14 mm (1/2")
- Flange Hole Diameter: Ø52 mm
- Flange Hole Spacing: Ø2"
- Flange Hole Spacing: G1/2"
- Flange Hole Spacing: NPT 1/2"

Detail View Dimensions:


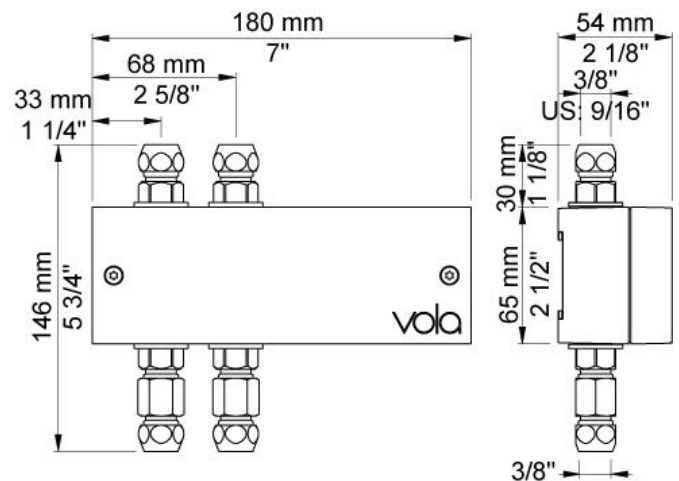
- Flange Thickness: 60 mm (2 3/8")
- Flange Hole Diameter: Ø36 mm
- Flange Hole Spacing: Ø1 3/8"
- Flange Hole Spacing: Ø43 mm
- Flange Hole Spacing: Ø1 3/4"
- Flange Hole Spacing: Ø46 mm
- Flange Hole Spacing: Ø1 7/8"
- Flange Hole Spacing: Ø54 mm
- Flange Hole Spacing: Ø2 1/8"

**NR41**


Betjeningsgreb til 4900.VVS nr. 745194200, farve 16 krom.VVS nr. 745194281, farve 20 børstet krom.VVS nr. 745194240, farve 40 rustfrit stål.


**VR2618**

Elektronikboks til HV1E, HV1EN, 4911, 4921, 4911VS og 4921VS.VVS nr. 704221900

**VR510**

Sensor øje til 4300, 4800 og 4900.VVS nr. 745179800, farve 16 krom.



**VR512**

60 mm dækroset. Hul Ø38 mm.

