

VOLA 100, 100X, 200, 200V, 300  
VOLA 400DV, 400, 400V, 400N, 400NV, 400T  
VOLA 400TV, 400F, 400FV, 400R, 400RV  
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400  
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV  
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction      Monteringsv gledning  
Montageanleitung      Montage hanleiding  
Monteringsvejledning      Manuel de montage

04/00029  
04/00031  
04/00055

www.vola.com

100-2100\_V3\_40998502  
09-01-2024

5 705230 286211

| <a href="http://vola.com">vola.com</a>                               | L                 | L1            | L2                | H               | H1               | D               |
|----------------------------------------------------------------------|-------------------|---------------|-------------------|-----------------|------------------|-----------------|
| 100, 100X, 200V, 300, 400V, 400DV<br>2100, 2100X, 2200V, 2300, 2400V | 377 mm<br>14 3/4" | 260 mm<br>10" | 268 mm<br>10 1/2" | 95 mm<br>3 3/4" | 186 mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 400NV, 400TV<br>2400NV, 2400TV                                       | 475 mm<br>18 3/4" | 355 mm<br>14" | 367 mm<br>14 1/2" |                 |                  |                 |
| 400FV, 400RV<br>2400FV, 2400RV                                       | 552 mm<br>21 3/4" | 435 mm<br>17" | 447 mm<br>17 5/8" |                 |                  |                 |



**A**

**Data, 3 Bar/43.5 Psi:**

|        | l/min. | Gal/min. |
|--------|--------|----------|
| 100:   | 18,3   | 4.8      |
| 400V:  | 15,6   | 4.1      |
| 2100:  | 25,2   | 6.7      |
| 2400V: | 22,2   | 5.9      |

Max. 65°C, 150°F

**Max.: 10 Bar/145 psi**

**B**

Check the local legislation.  
Bitte die  rtlichen Vorschriften  berpr fen.  
Tjek de lokale regler.  
Kontrollera den lokala lagstiftning.  
Verifieer de lokale regelgeving.  
V rifiez la l gislation locale.

**C**

DE:  
Bitte separat beiliegende Anleitung f r die Schalld mpfer VR1249 beachten

DE:  
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

**D**

Box till inbygggnadsblandare.  
Boks til indbyggningsblander.  
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.  
Ikke inkludert, k pes separat.  
Eiv t sis lly tilaukseen, ostettava erikseen.

Extension  
Verl ngerung  
Forl ngerdele  
F rl ngning  
Aanpassing  
Modification

| T          | Y           | VR1260/2260/1400/2019 |
|------------|-------------|-----------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                  |
| 15 - 25 mm | 98 - 88 mm  | +10                   |
| 25 - 35 mm | 88 - 78 mm  | +20                   |
| 35 - 45 mm | 78 - 68 mm  | +30                   |
| 45 - 55 mm | 68 - 58 mm  | +40                   |
| 55 - 65 mm | 58 - 48 mm  | +50                   |

Fitting of extension  
Montage von verl ngerung  
Montering af forl ngerdele

Montering av f rl ngning  
Montage van de verlengstukken  
Montage des rallonges

**VR1260+**

**VR2260+**

**VR2019+, VR2119+**

**VR1400+**

**400-2400**



2x13 mm Lightweight wall Leichtwand Let væg Lätta konstruktion Holle wandconstructie Construction légère



1x15 mm 1x18 mm 1x20 mm 2x13 mm Lightweight wall Leichtwand Let væg Lätta konstruktion Holle wandconstructie Construction légère



Masonry Mauerwerk Murværk Murwerk Massieve wand Mur Plein



2 Test Pressure Prüfdruck testtryk Test tryck Test druk test de pression Vérifiez la législation locale. Check the local legislation. Bitte die örtlichen Vorschriften überprüfen. Tjek de lokale regler. Kontrollera den lokala lagstiftning. Verifieer de lokale regelgeving. 1. MAX. 16 Bar 232 Psi 2. MAX. 4 Bar 58 Psi ! Water - Wasser - Vand - Vatten - Water - L'eau ! MAX 1 Minute - Minut - Minuut !



Fitting instruction  
Montageanleitung  
Monteringsvejledning  
Monteringsvægledning  
Montage hanleiding  
Manuel de montage



T60:



T68:



T65:



1

T60

28 mm  
1 1/8"

55 mm  
2 1/8"

Ø17 mm  
Ø11/16"

290 mm  
11 3/8"

1500 mm  
5'

G1/2"

28 mm  
1 1/8"

Ø60 mm  
Ø2 3/8"

| Data | Bar:                 | 1          | 2          | 3         | 4         | 5         |
|------|----------------------|------------|------------|-----------|-----------|-----------|
| T60  | (l/min)<br>(Gal/min) | 6.9<br>1.8 | 9.8<br>2.6 | 12<br>3.2 | 14<br>3.7 | 15<br>4.1 |

Max. 65°C. 150°F

Service - VR556

Bathtub  
Badewanne

Badekar  
Badkar

Badkuip  
Baignoire

2

T68

Ø43 mm  
Ø1 3/4"

40 mm  
1 5/8"

Ø6 mm  
1/4"

25 mm  
1"

001G

SILICONE

Min. 200 mm  
Min. 8"

Min. 350 mm  
Min. 14"

3

T65

50 mm  
2"

55 mm  
2 1/8"

Ø60 mm  
Ø2 3/8"

50 mm  
2"

790 mm  
31"

690 mm  
27 1/8"

590 mm  
23 1/4"

490 mm  
19 1/4"

900 mm  
35 3/8"

800 mm  
31 1/2"

700 mm  
27 1/2"



600 mm  
23 5/8"

1





USA:  
Max. flow rate:  
1.6 Gal/min  
6.0 l/min.


4

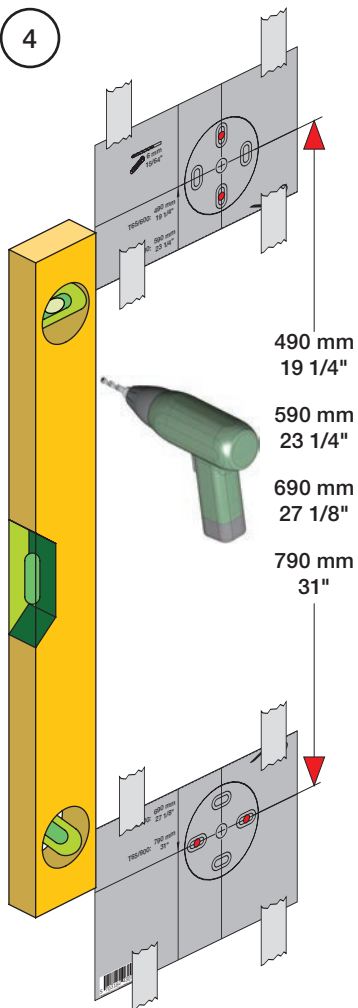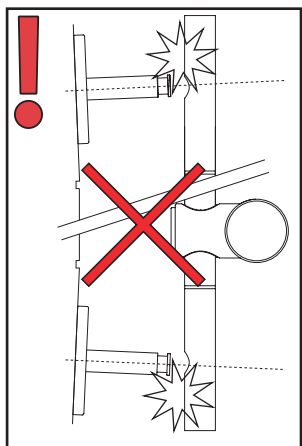490 mm  
19 1/4"590 mm  
23 1/4"690 mm  
27 1/8"790 mm  
31"



5

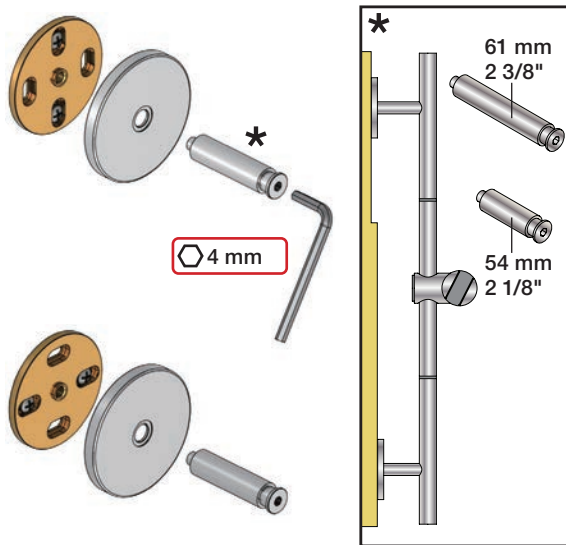Ø6 mm  
Ø15/64"24 - 42 mm  
1" - 1 3/4"Ø54 mm  
Ø2 1/8"

6

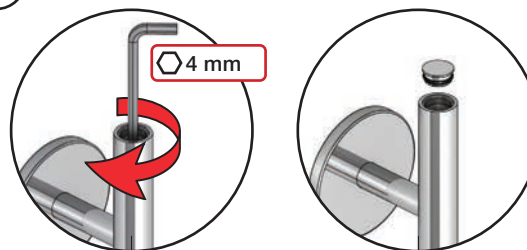

4 mm

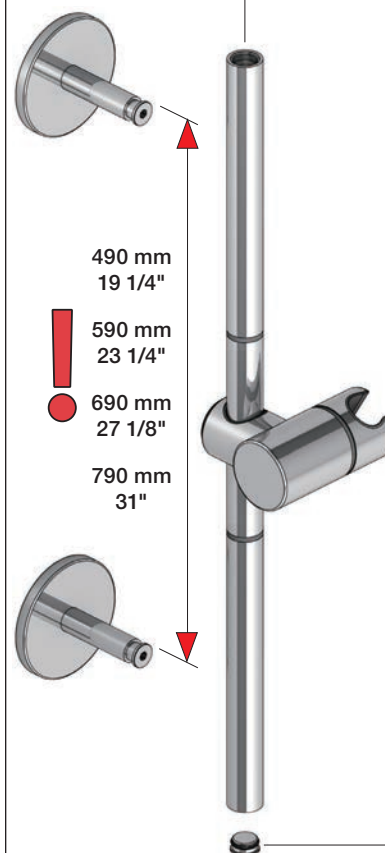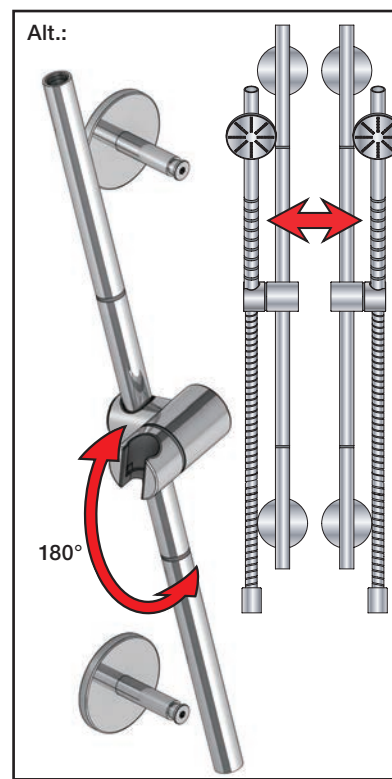490 mm  
19 1/4"590 mm  
23 1/4"690 mm  
27 1/8"790 mm  
31"

Alt.:

180°

7




8

2 mm



Do not cut the membrane  
Die Membran nicht schneiden  
Skær ikke membranen  
\* Skär inte membranet  
Snij het membraan niet door  
Ne coupez pas la membrane  
No cortar la membrana



\*Membran används inte i SVERIGE,  
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:

2

Förlängning  
Verlängerung  
Forlængelse  
Modification



VR2260/VR1400/VR2019


|           |            |      |
|-----------|------------|------|
| Tiles:    | 3 - 15 mm  | Std. |
| Fliesen:  | 15 - 25 mm | +10  |
| Fliser:   | 25 - 35 mm | +20  |
| Tegels:   | 35 - 45 mm | +30  |
| Carreaux: | 45 - 55 mm | +40  |
|           | 55 - 65 mm | +50  |




VR2260/VR1400/VR2019

|  |             |      |
|--|-------------|------|
|  | 35 - 47 mm  | Std. |
|  | 25 - 35 mm  | +10  |
|  | 15 - 25 mm  | +20  |
|  | 5 - 15 mm   | +30  |
|  | -5 - 5 mm   | +40  |
|  | -15 - -5 mm | +50  |

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




|         |       | A          |
|---------|-------|------------|
| VR2279  | 16 mm | 30 - 34 mm |
| VR2279B | 12 mm | 26 - 30 mm |
| VR2279C | 8 mm  | 22 - 26 mm |


NR 21 - 2




NR 21 - 3




NR 21 - 4






| VR1260/VR1400/VR2019              |                      |      |
|-----------------------------------|----------------------|------|
| Titles:<br>Fliessen:<br>Fliessen: | Tegels: 3 - 15 mm    | Std. |
|                                   | Carreaux: 15 - 25 mm | +10  |
|                                   | 25 - 35 mm           | +20  |
|                                   | 35 - 45 mm           | +30  |
|                                   | 45 - 55 mm           | +40  |
|                                   | 55 - 65 mm           | +50  |



| VR1260/VR1400/VR2019 |            |      |
|----------------------|------------|------|
|                      | 40 - 52 mm | Std. |
|                      | 30 - 40 mm | +10  |
|                      | 20 - 30 mm | +20  |
|                      | 10 - 20 mm | +30  |
|                      | 0 - 10 mm  | +40  |
|                      | -10 - 0 mm | +50  |
|                      |            |      |


## NR 19/NR24



NR 19:  
Ø40 mm  
Ø1 5/8"

NR 24:  
Ø43 mm  
Ø1 3/4"

## NR 28





## NR 28 - 1

## VR3279

## VR3279B

## NR 28 - 2

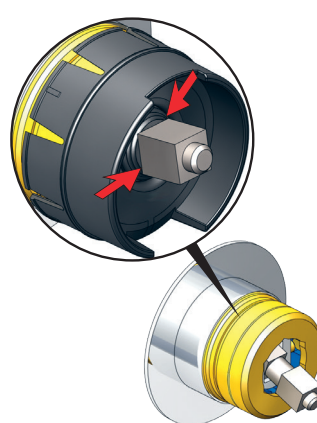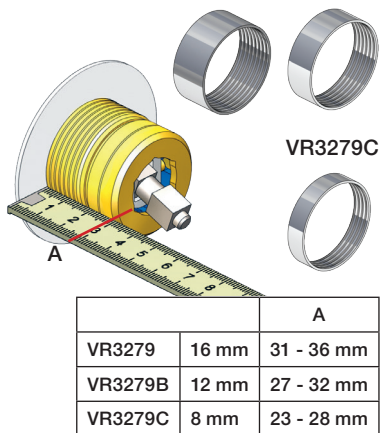


## NR 19 - 1 NR 24 - 1


## VR2204

## VR2204B


## VR2204C

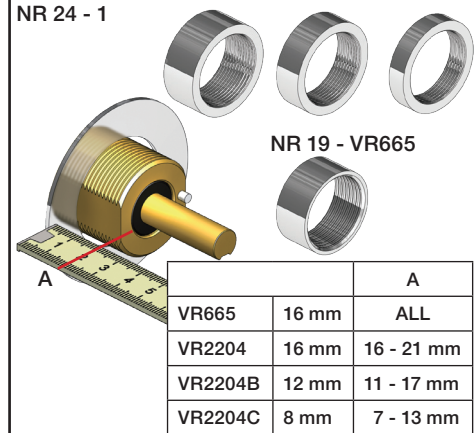


## NR 28 - 3

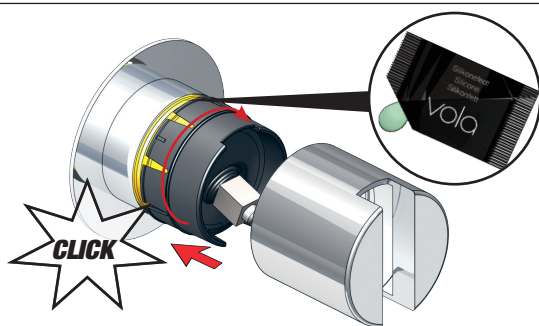

## NR 28 - 4



## NR 19 - 2 NR 24 - 2

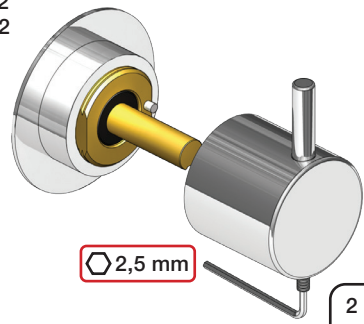


2100




NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C  
 VR1277K: VR22, VR1277, VR2269


2100





2100X




2200V




2300



2002




2003KB



2003B

-



2002



2001, 001



2001, 001



2001



2001, 001






**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 2100**  
 2100X, 2200V, 2300


Date  
 May. 22

Rev.  
 4

Sheet  
 SB 10.7

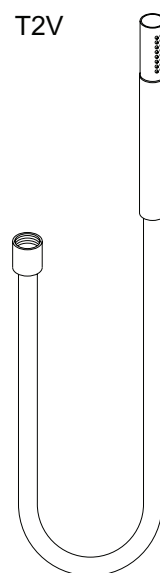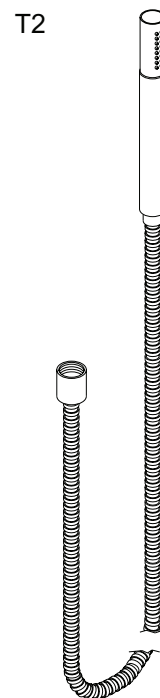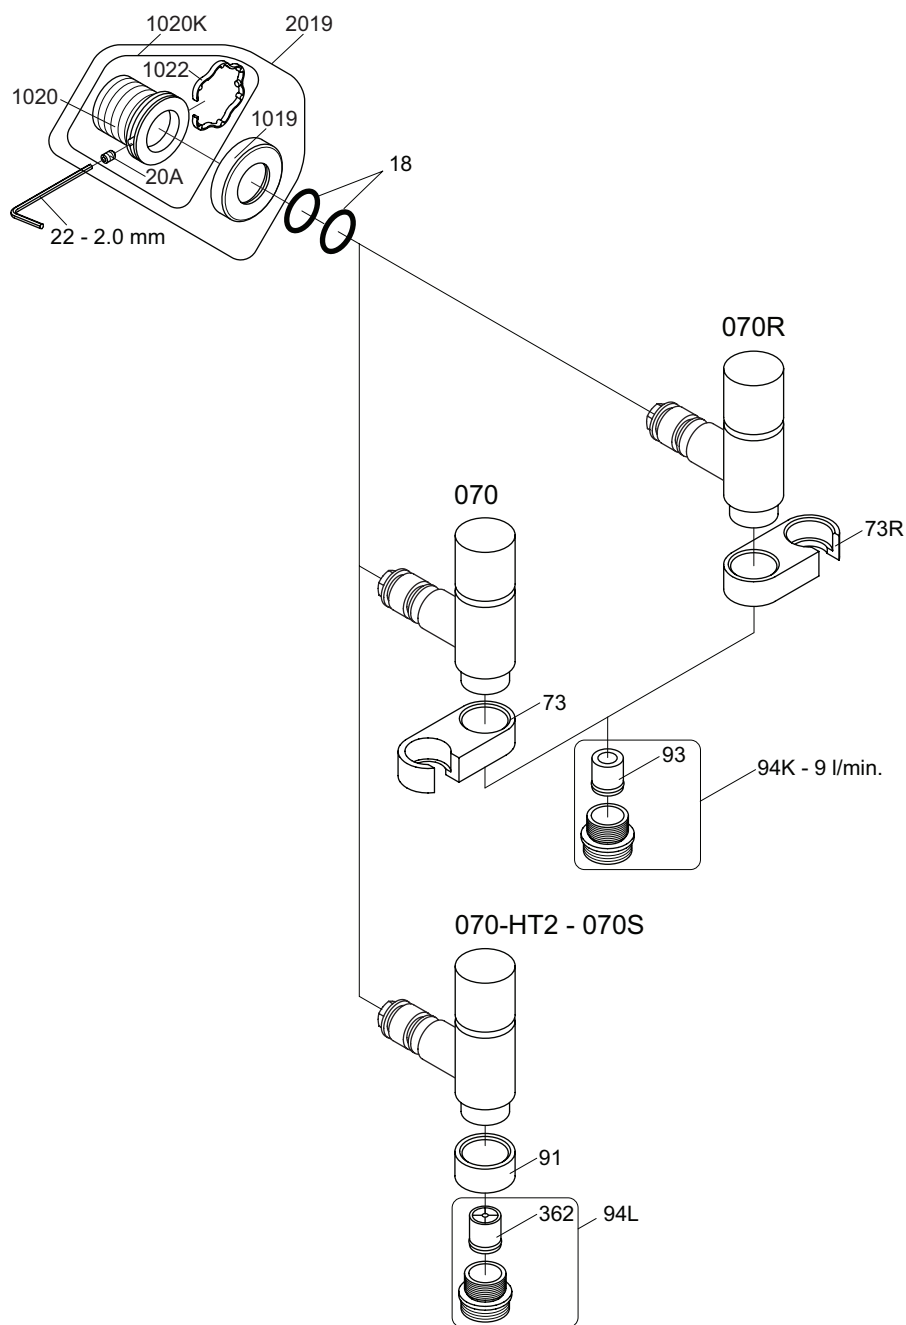

VR1020K: VR20A, VR22, VR1020, VR1022  
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022





**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

## VOLA 070, 070R 070-HT2

Date  
 Apr. 21

Rev.  
 5

Sheet  
 SB 16

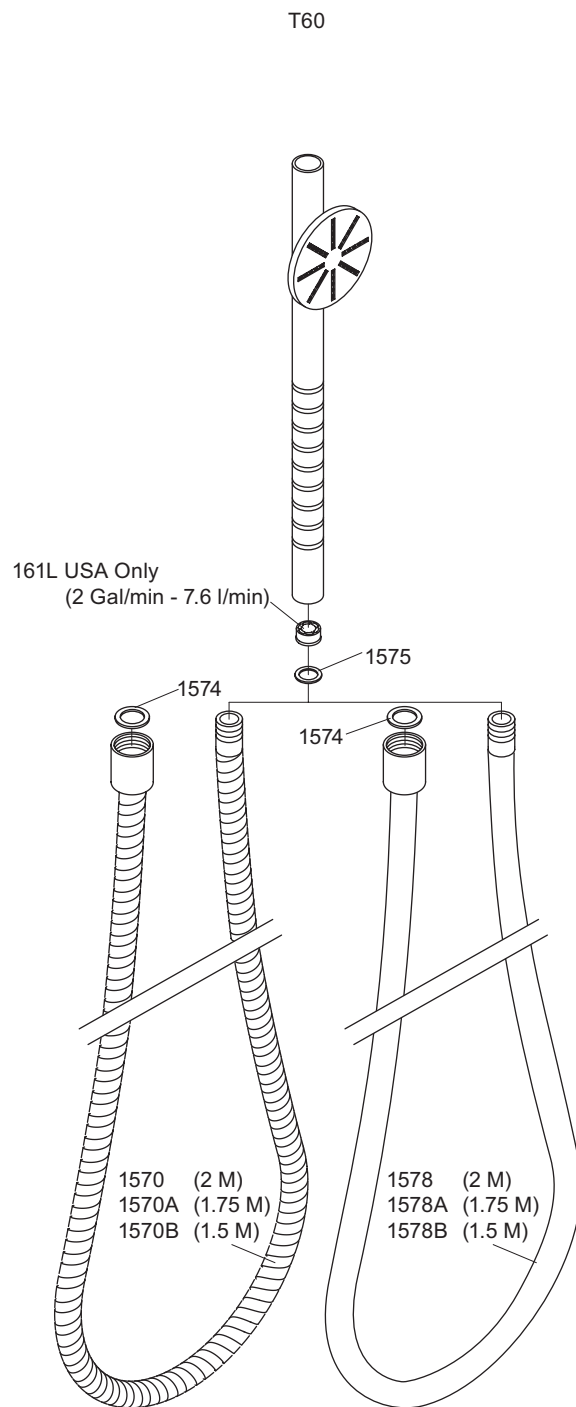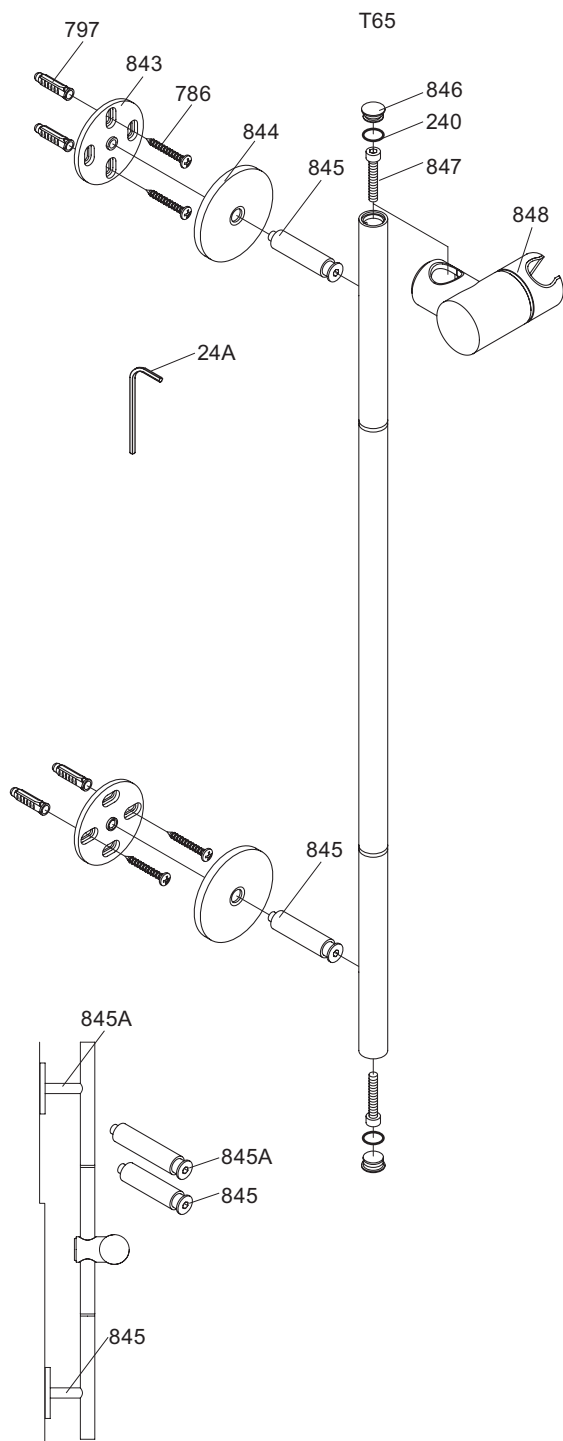

**vola**

Lunavej 2  
DK-8700 Horsens  
Tlf : + 45 7023 5500  
sales@vola.com  
www.vola.com

## VOLA T65

### T65-T60

Date  
Mar. 15

Rev.  
0

Sheet  
SB 42.65