

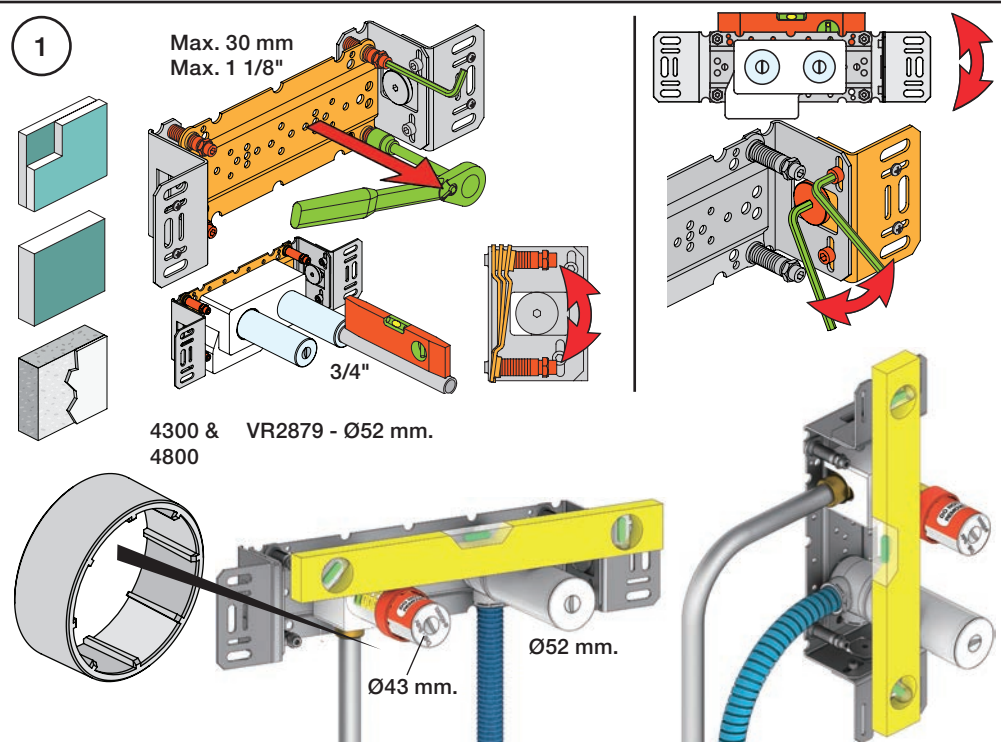
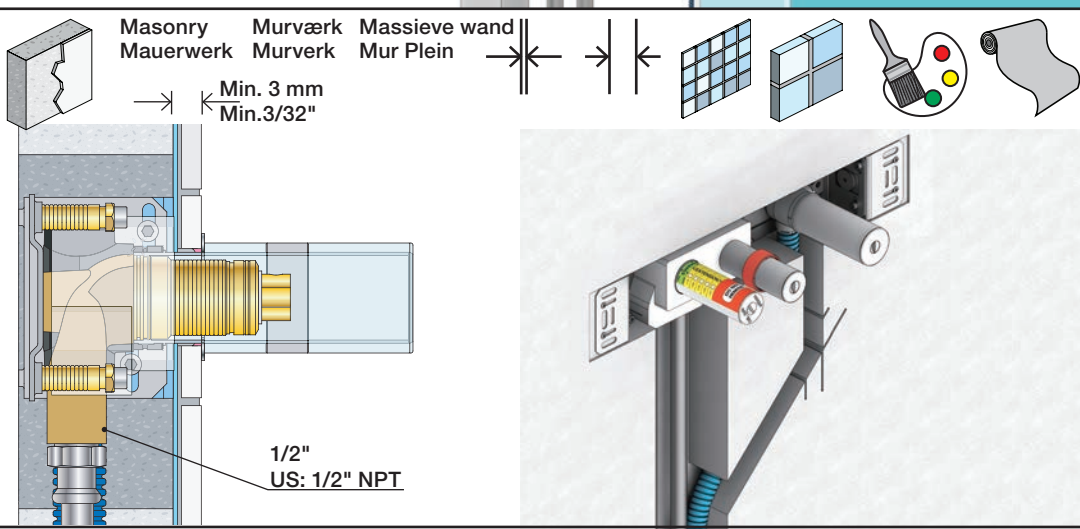
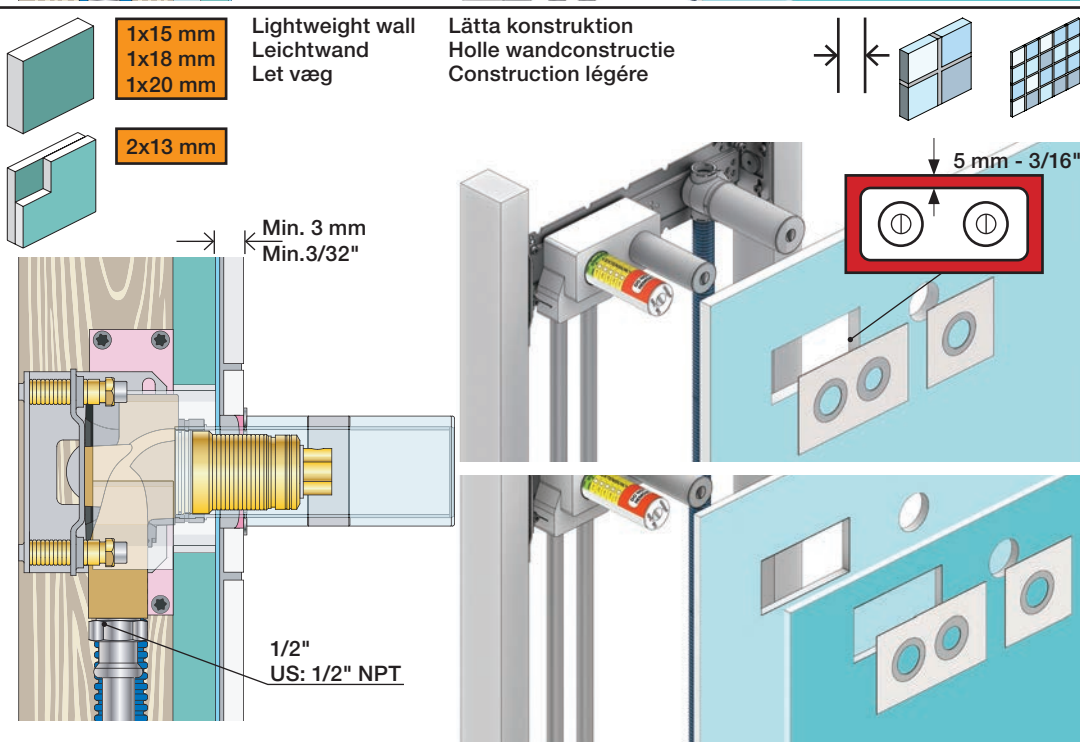
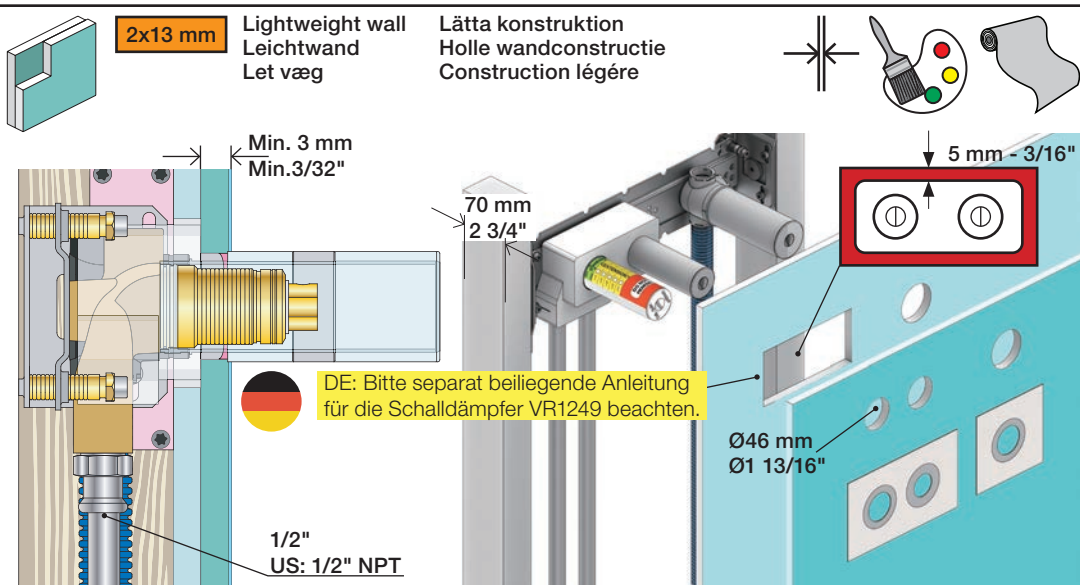
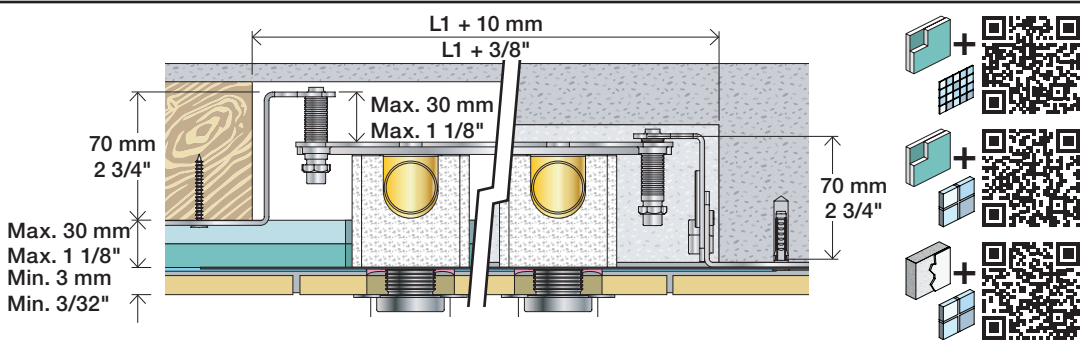
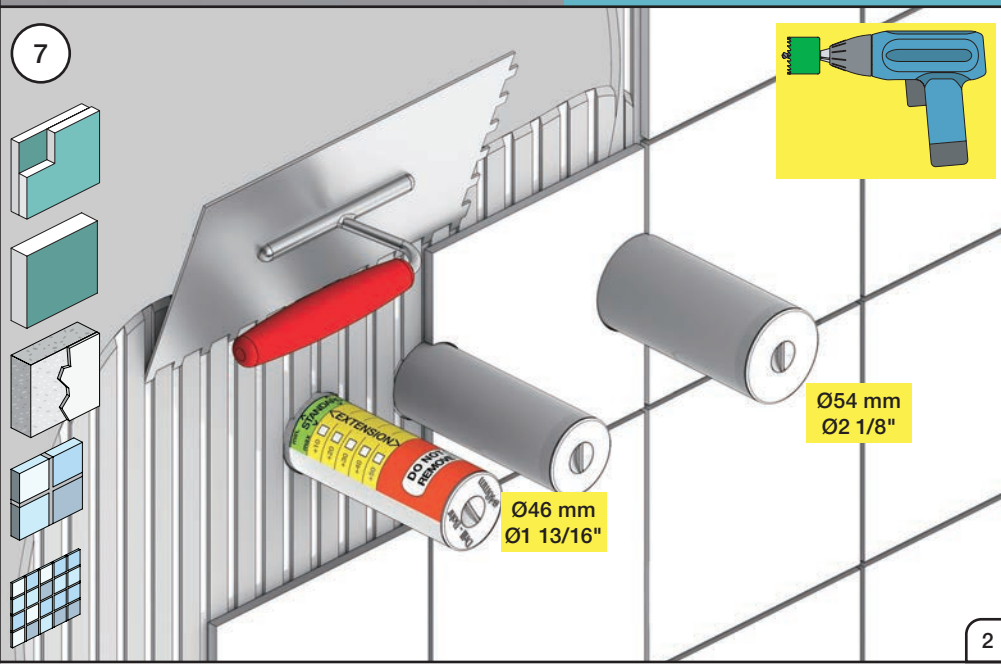
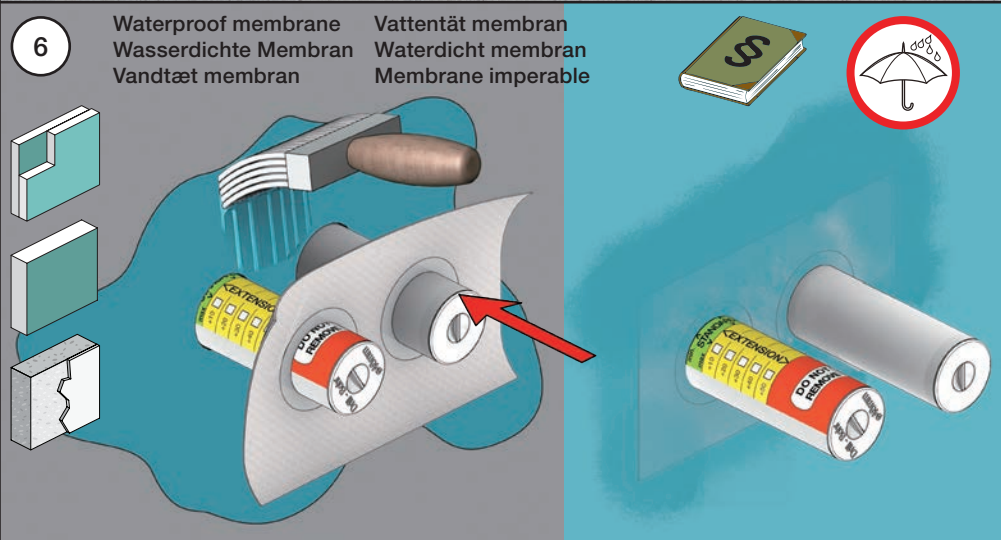
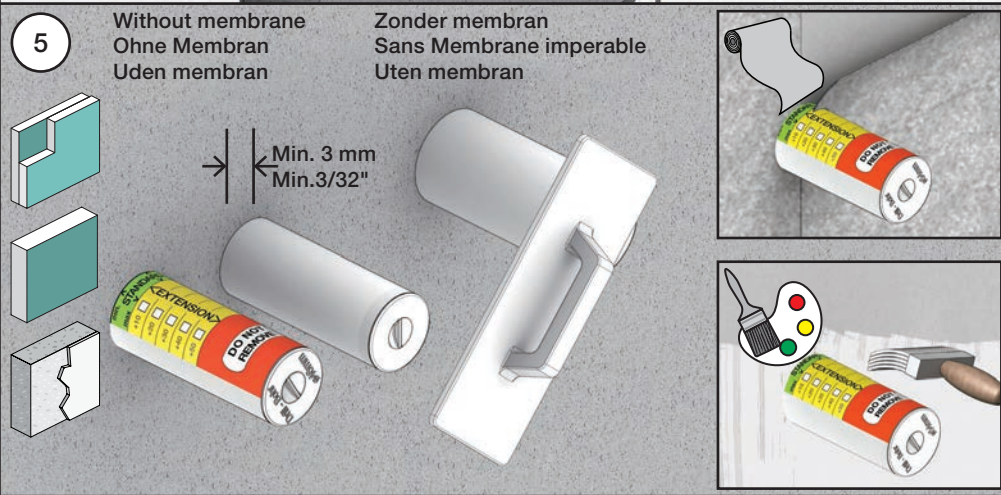
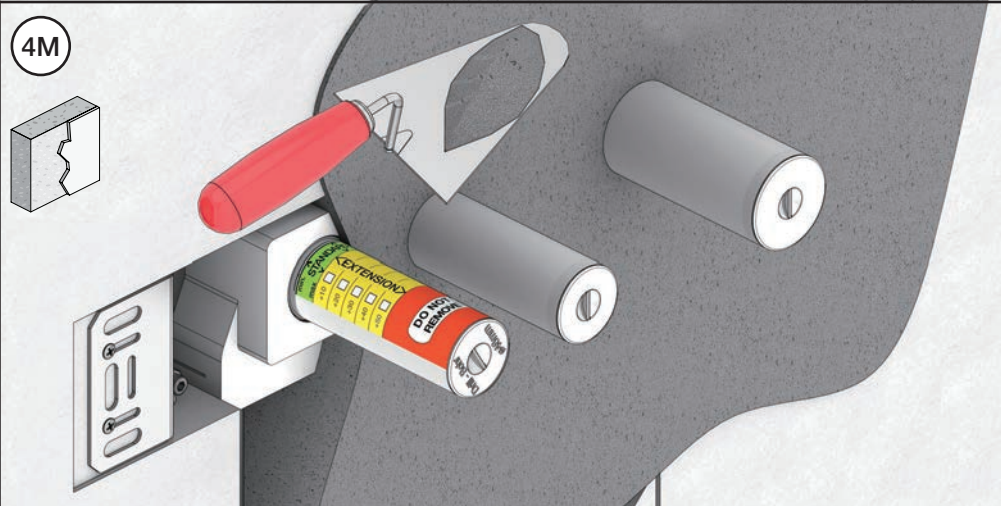
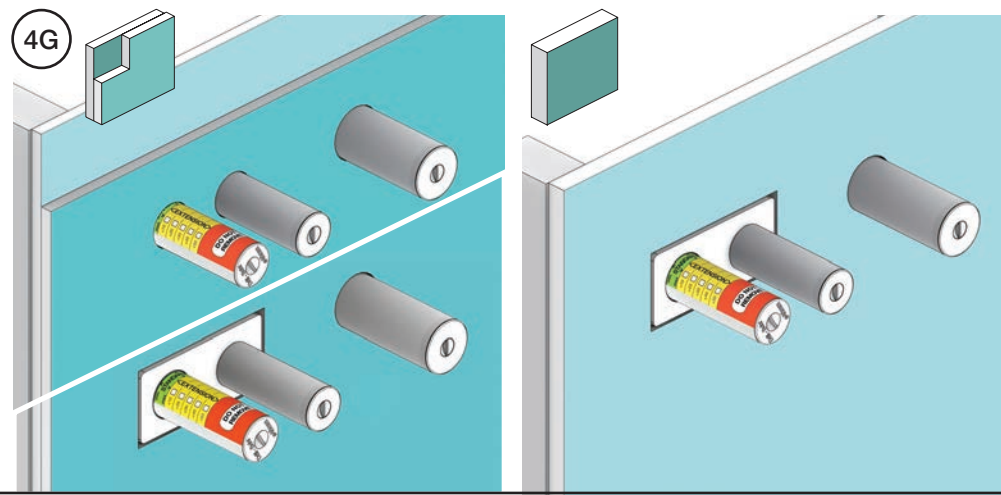


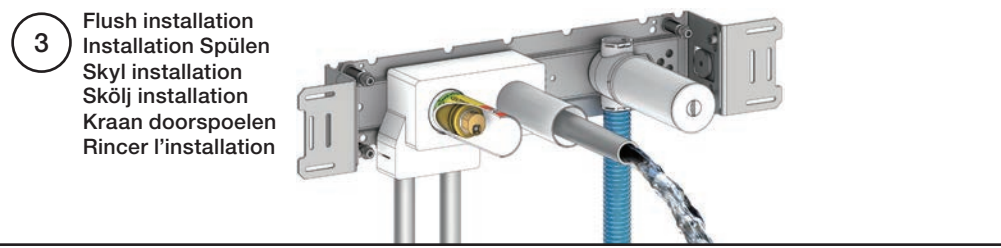

2 Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand ! MAX 1 Minute - Minut !
! Vatten - Water - L'eau ! MAX 1 Minuut !

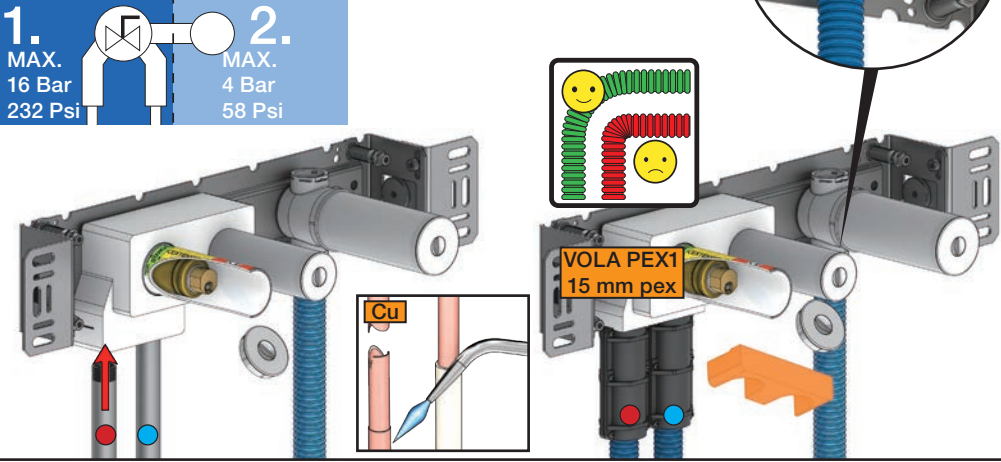

VOLA Electronic

Elektronikboks

Valve box

Ventil Kasten

Ventilbox


Ventiel doos

Boite étanche avec vanne




EU EMC directive
2004/108/EU
IPX4

VR2618



VR2617



www.vola.com

mnt_Elektronikbox_V10_40999840
17-03-2022

© VOLA A/S




vola

Settings: Einstellung:	Setting: Justering:	Afstelling: Réglage:			
	Sec.	1	2	3	4
DEFAULT SETTING:		ON	ON	ON	ON
ON	0	ON	ON	ON	ON = 20 sec. - hygienic rinse every 24h. - hygienische spülung jede 24 stunde. - hygiejneskyl 24t efter sidste brug. - hygienisk skölja varje 24 timmar. - hygiénisch spoelen iedere 24 uur. - Rinçage hygiénique chaque 24h.
OFF	3	ON	OFF	ON	
	5	ON	OFF	OFF	
	8	OFF	ON	ON	
	10	OFF	ON	OFF	
	15	OFF	OFF	ON	
	20	OFF	OFF	OFF	
SPECIAL: Long spout Lange Auslauf Langt udløb Långt utlopp Lange uitloop Long bec	*0	ON	ON	OFF	


installation requirements:
Installationsanforderungen:

Sunlight or light from halogen lamps can shorten the signal range.
Sonnenlicht oder Licht von Halogenlampen können das Signal verkürzen.
Skarpt sollys eller halogenlys, kan forkorte rækkevidden.
Starkt sollys eller halogenbelysning kan förkorta signalen/känsligheten.
Directe lichtinval van de zon of van halogeen lampen kan het signaal verkorten.
La lumière du soleil ou des lampes à halogène peut perturber le fonctionnement du détecteur.




Krav til installation:
Installationskrav:

No mirroring surfaces opposite the sensor.
Keine spiegelnden Flächen vor dem Sensor.
Ingen reflekterende overflader modsat sensoren.
Inga speglade ytor motsatta sensorn.
Geen spiegelen oppervlakken tegenover de sensor.
Pas de surfaces réfléchissantes opposées du capteur.



Adapter/ Adapteur VR2624 & VR2636

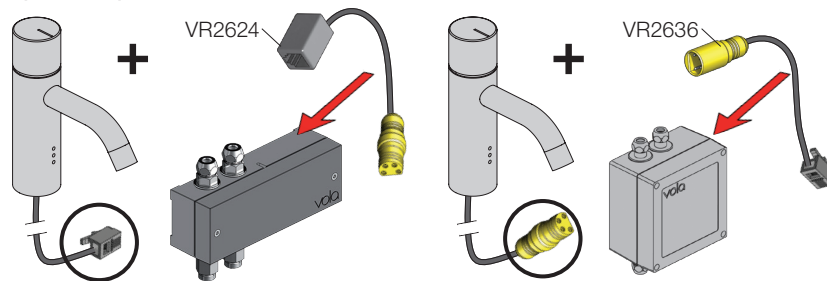

DC Power supply
DC Stromversorgung

VR2622: ROW & GB 110 - 230V~/50-60Hz
VR2626: EU 9V~/300 mA
VR2623, IPX5: 100 - 240V~/50-60Hz/130mA
9V~/660 mA

DC strømforsyning
DC Nätaggregat

DC voeding
Alimentation électrique

VR2622-VR2623-VR2626
VR2624-VR2636:
To be ordered separately
Separat bestellen
Bestilles særskilt
Beställas separat
Apart te bestellen
À commander séparément

VR2622/VR2626: 2 m

VR2623, IP64: 1 m

Battery operation
Batteriebetrieb


2 x 1.5V AA - FR6 - FR6

Batteridrift
Batteridrift


Batterij bedrijf
Fonctionnement sur batterie

Batteries **MUST** be removed if operated by Power supply.
Batterien **MÜSSEN** bei Stromversorgung entfernt werden.
Batterierne **SKAL** fjernes ved brug af strømforsyning.
Batterier **SKAL** tas bort om der anvendes nätaggregat.
Batterijen **MOETEN** worden verwijderd als ze op netvoeding werken.
Les piles **DOIVENT** être impérativement retirées si on utilise l'alimentation électrique.

VR2618

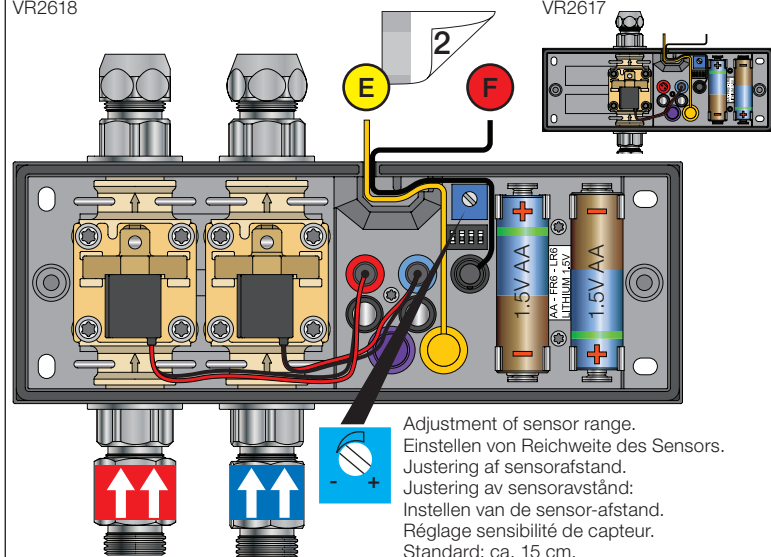


Adjustment of sensor range.
Einstellen von Reichweite des Sensors.
Justering af sensorafstand.
Justering av sensoravstånd:
Instellen van de sensor-afstand.
Réglage sensibilité de capteur.
Standard: ca. 15 cm.


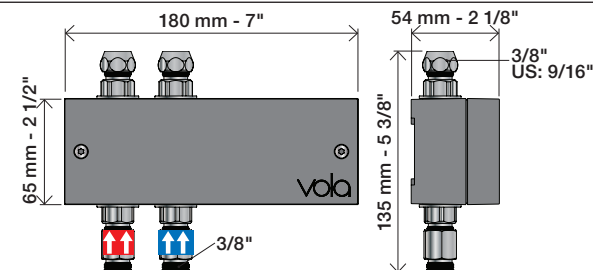


Technical drawing of a wall-mounted gas boiler unit. The drawing includes a vertical scale on the left with markings from 0 to 10. The boiler unit is shown in a side view, with a blue gas line and a yellow water line connected to it. A diagonal section on the right shows the internal components of the boiler, including a burner and a heat exchanger. The drawing is labeled with 'DIN 1946' and 'DIN 1947'.

Takmonterad
Plafondmontage
Monté au plafond

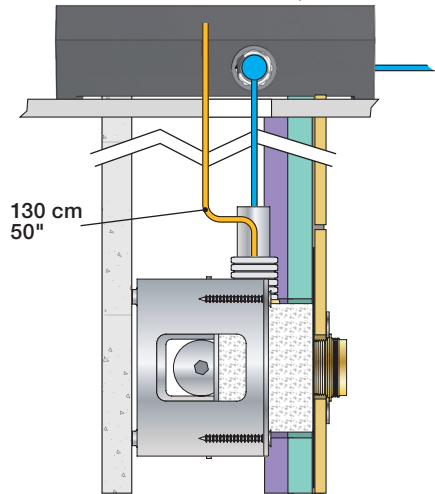


This technical drawing shows a side view of a wall-mounted gas valve assembly. The assembly consists of a main gas valve body mounted on a wall, with a pressure gauge connected to its side. A gas line enters the valve from the bottom. Two electrical wires, one blue and one yellow, run from the valve to a separate electrical control box mounted on the wall. The drawing includes dimension lines and labels for various components and measurements.

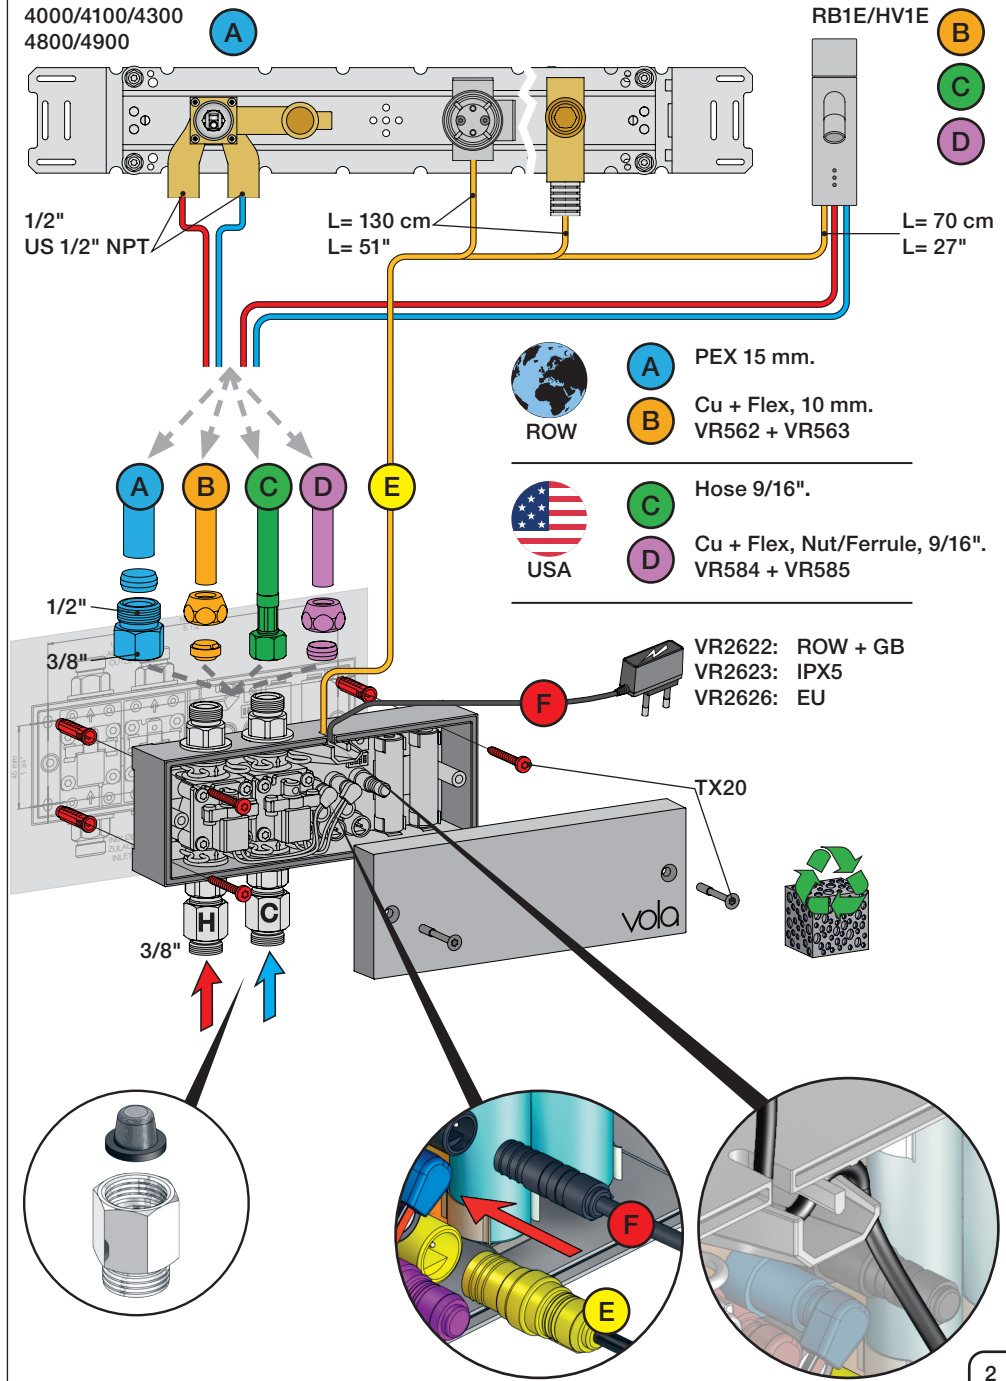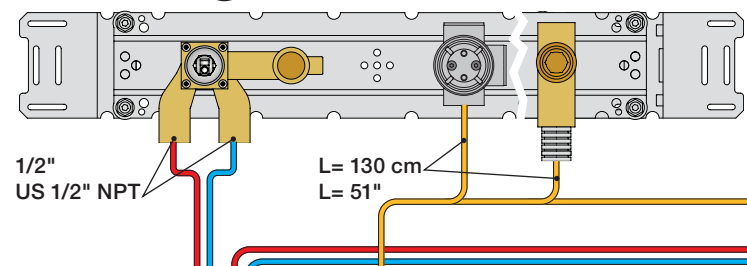

4811/4821


4812/4822

968

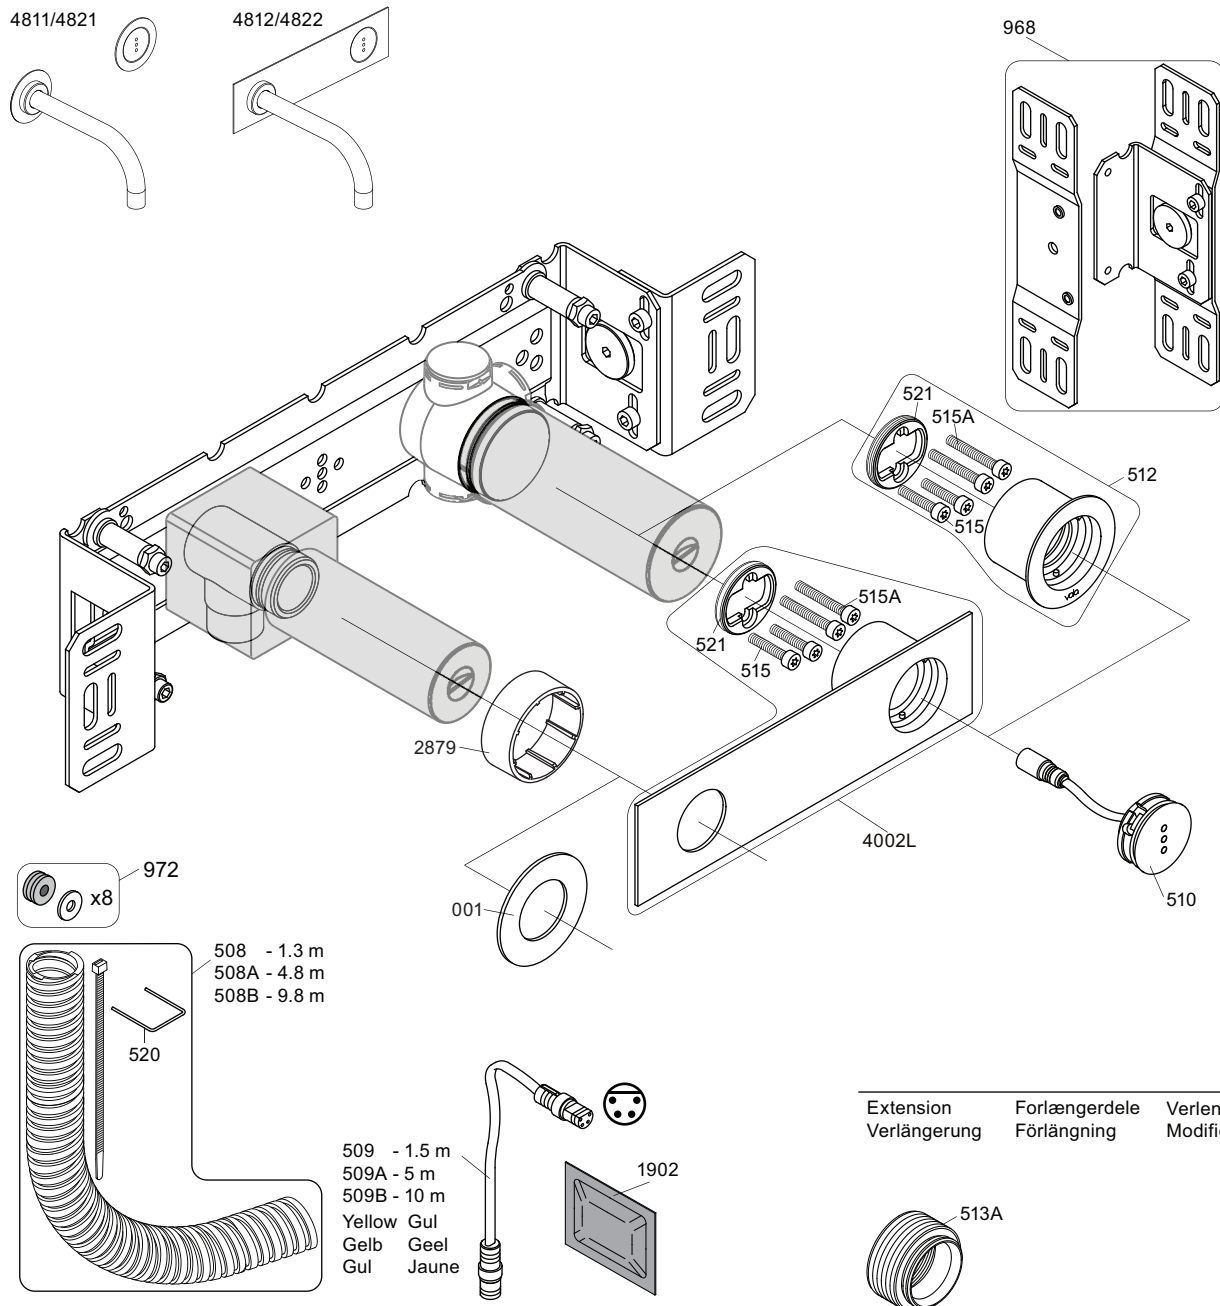

VR512: 2xVR515, 2xVR515A VR521
 VR4002L: 2xVR515, 2xVR515A VR521

4800

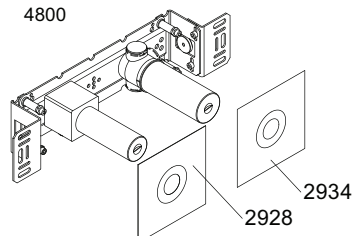


vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 4800

Date
May 22

Rev.
3

Sheet
SB 40.48

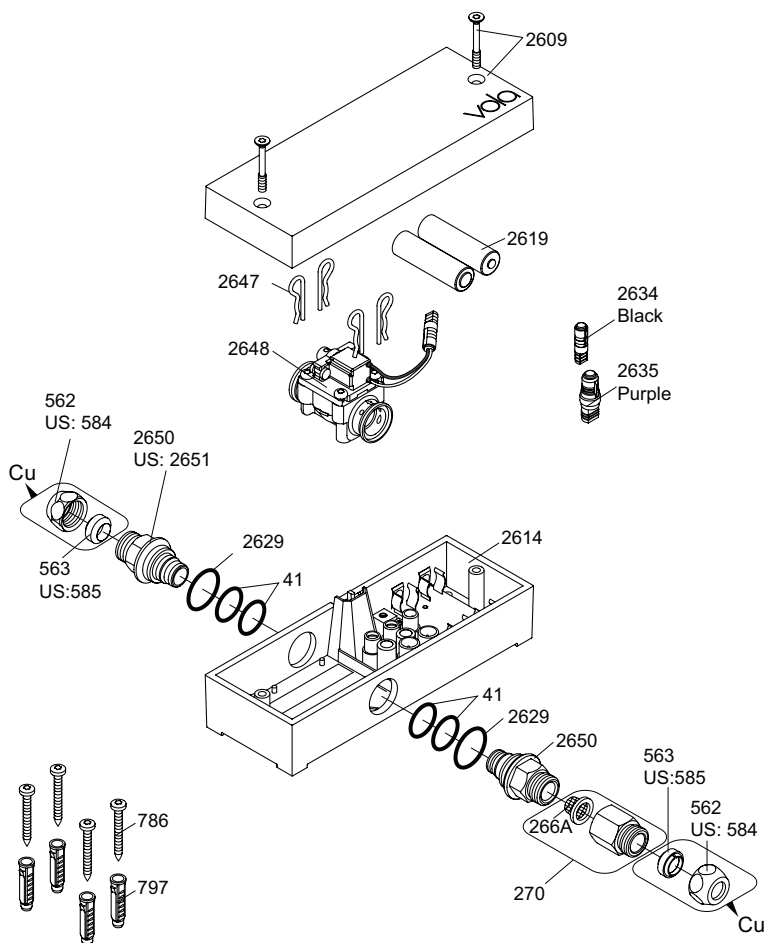

VR2650: 2xVR41, VR2652, VR2629
 VR2651: 2xVR41, VR2652, VR2629 (USA)
 VR2654: 4xVR2647, VR2648, 2xVR2650, 2xVR266A

Additional parts **Zusätzliche Teile** **Supplerner dele** **Ytterligare delar**

Extra onderdelen **Pièces supplémentaires** **Las piezas adicionales**

Remote control
 Fernbedienung
 Fjernbetjening
 Fjärrkontroll

Afstandsbediening
 Contrôle à distance
 Telemando

2625




Power supply
 Netzteil
 Strømforsyning
 Strömförsörjning

Stroomvoorziening
 Alimentation
 Convertidor adaptador



2622: ROW&GB
 2626: EU

	EU	GB	US	AUS
Type:	C	G	A	I



2623: IPX5

Extension

2639 - 5 m
 2645 - 10 m



Black
 Schwartz
 Sort

Svart
 Zwart
 Noir


Signal cable
 Signalkabel

Signaalkabel
 Câble de signal
 Cable de señal




41XX, 49XX:


509 - 1.5 m
 509A - 5 m
 509B - 10 m




RB1E, HV1E:
 2656 - 1.5 m




247



US: 2601\$




Cu: 221: Ø10 mm



Adapter
 Adapteur

Discontinued model
 aufgehörte Modell
 Udgået model
 Avvecklad modell
 Beëindigde model
 Modèle discontinuée




2624
 L 200 mm



RJ10 - 4/4

2636
 L 200 mm

RJ10 - 4/4



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA VR2617
RB1E/4300/4300/4800

Date:
 Feb. 23

Rev.:
 2

Sheet:
SB21.16