

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



T60:



T68:



T65:



1

T60

Data	Bar:	1	2	3	4	5
T60	(l/min)	6.9	9.8	12	14	15
	(Gal/min)	1.8	2.6	3.2	3.7	4.1

Max. 65°C. 150°F

Service - VR556

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

USA:



Max. flow rate:
1.6 Gal/min
6.0 l/min.

T8 → T68




3

T65


4

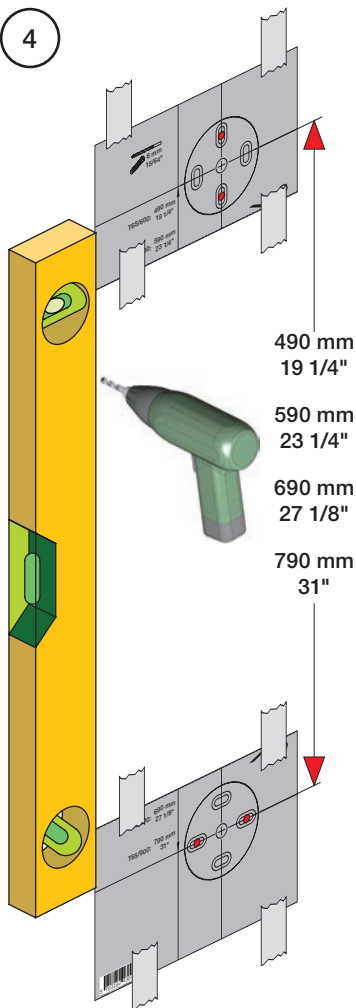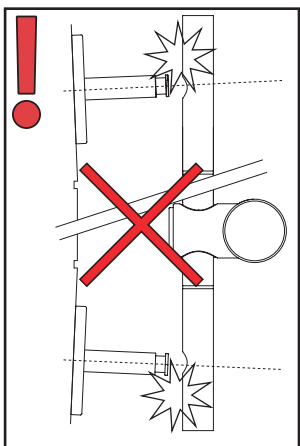490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"



5

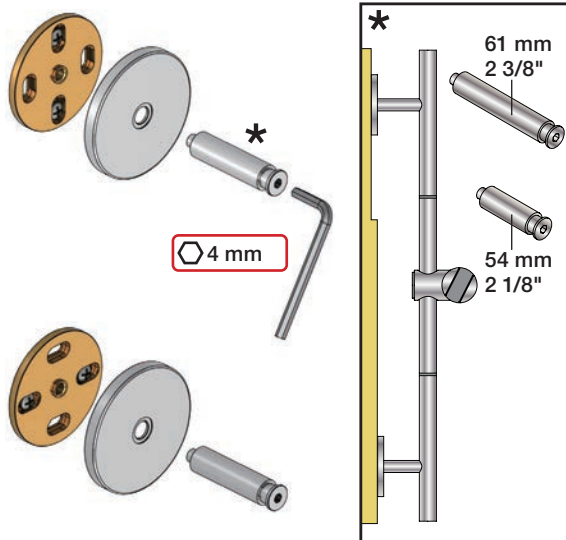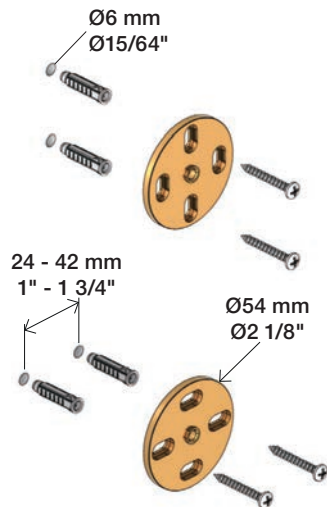

6

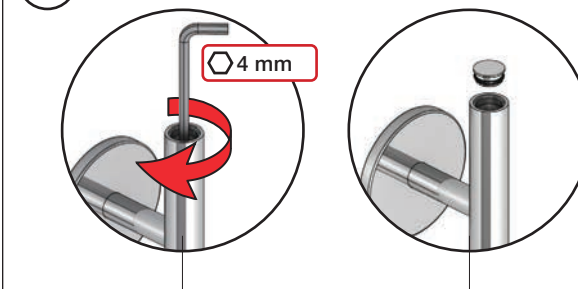

4 mm

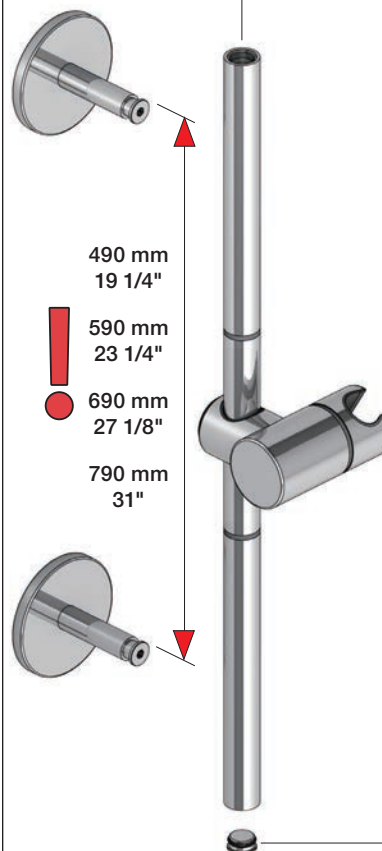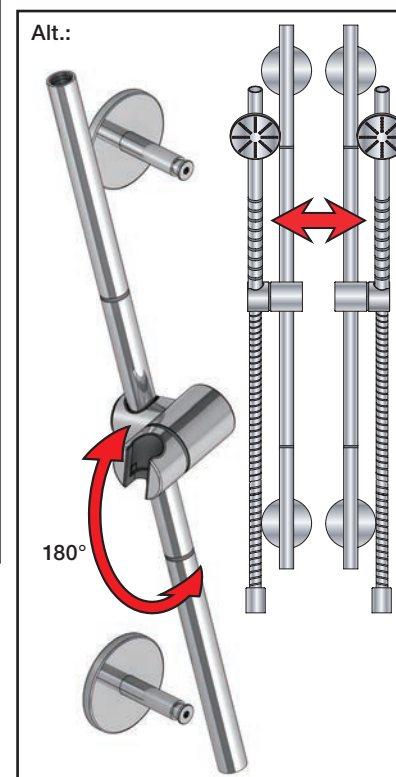490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

Alt.:

180°


7



8




2 mm

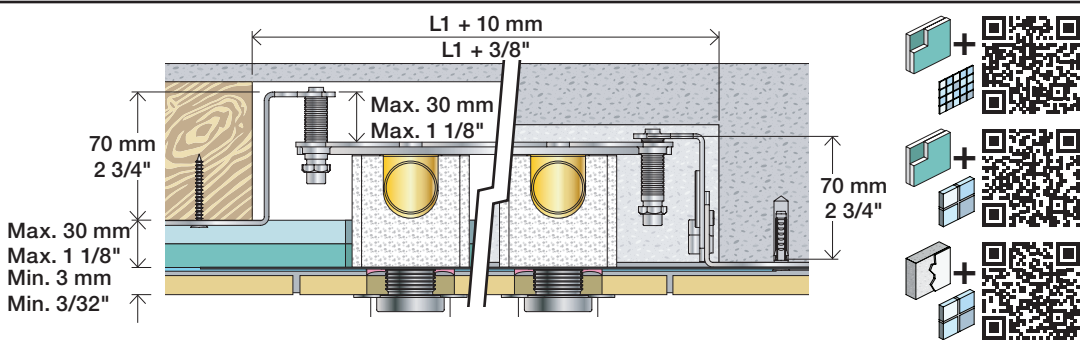

2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

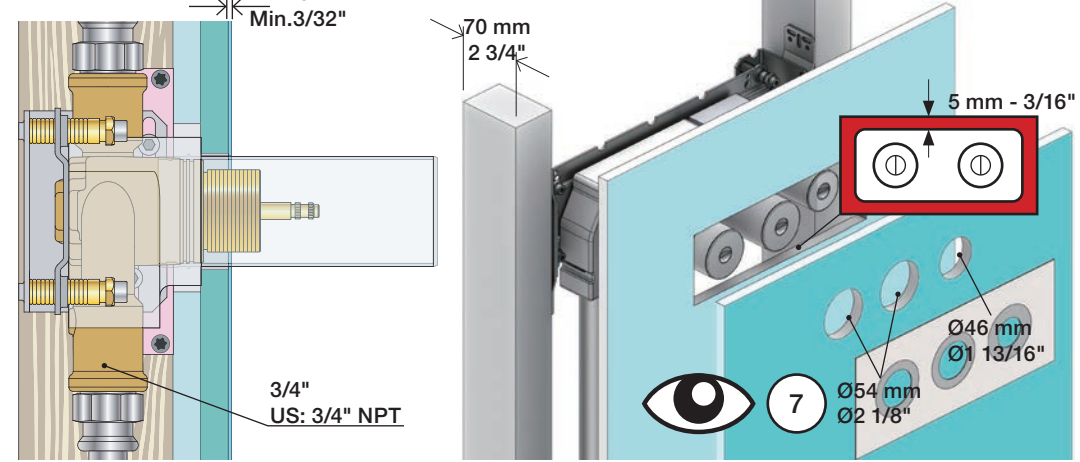

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







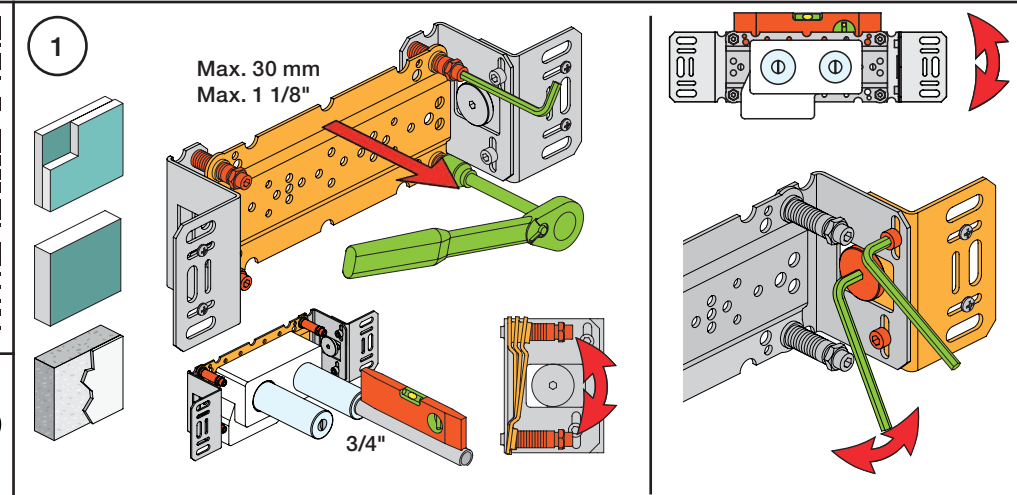


2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

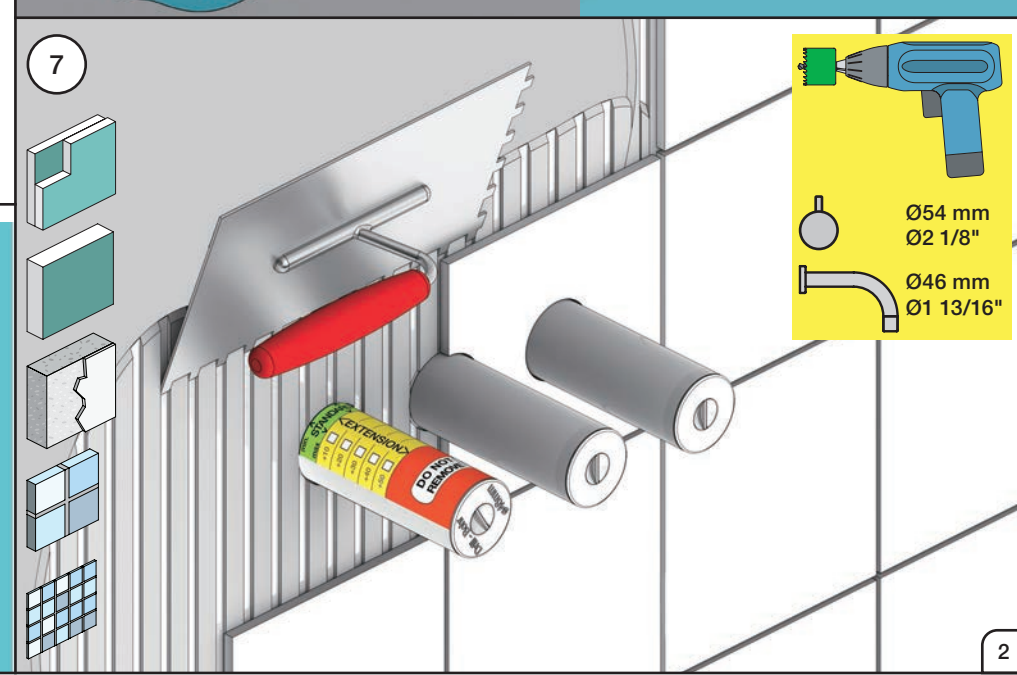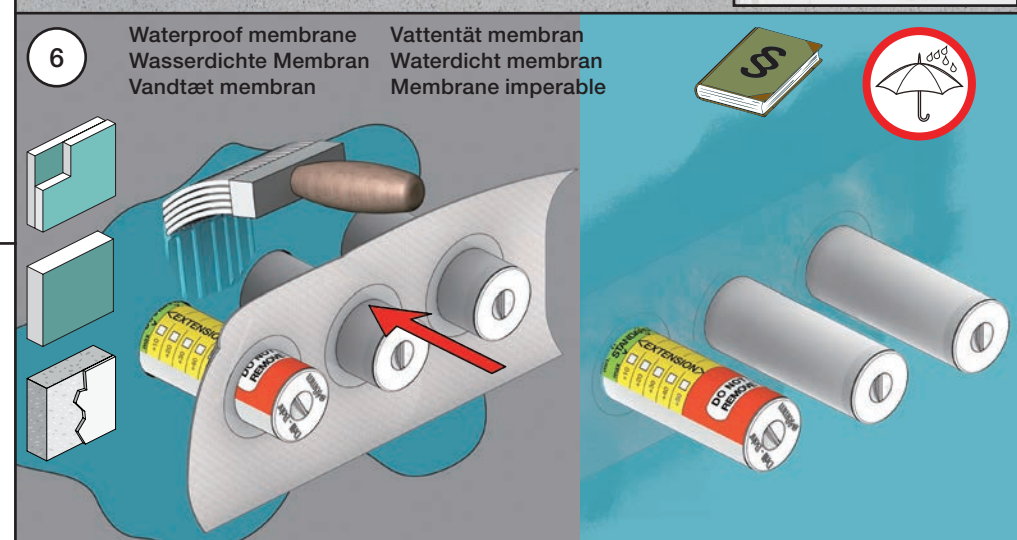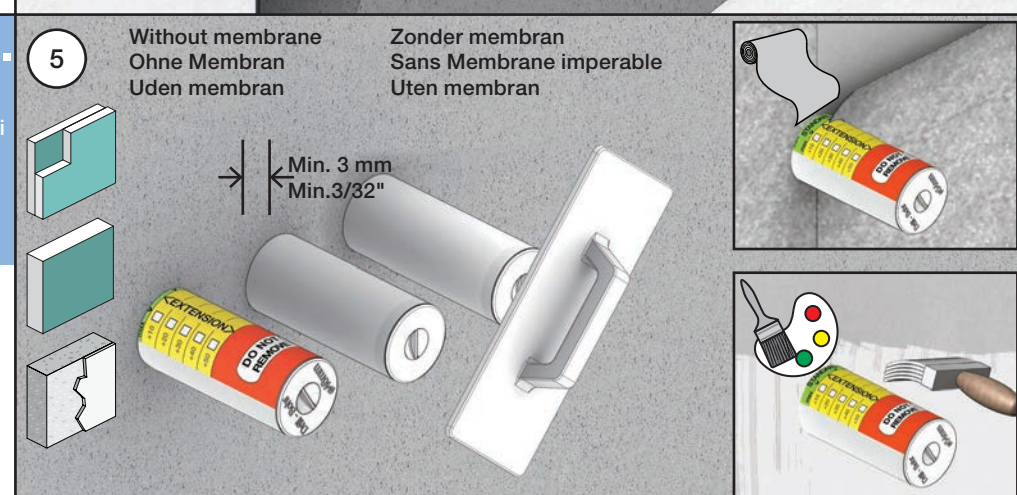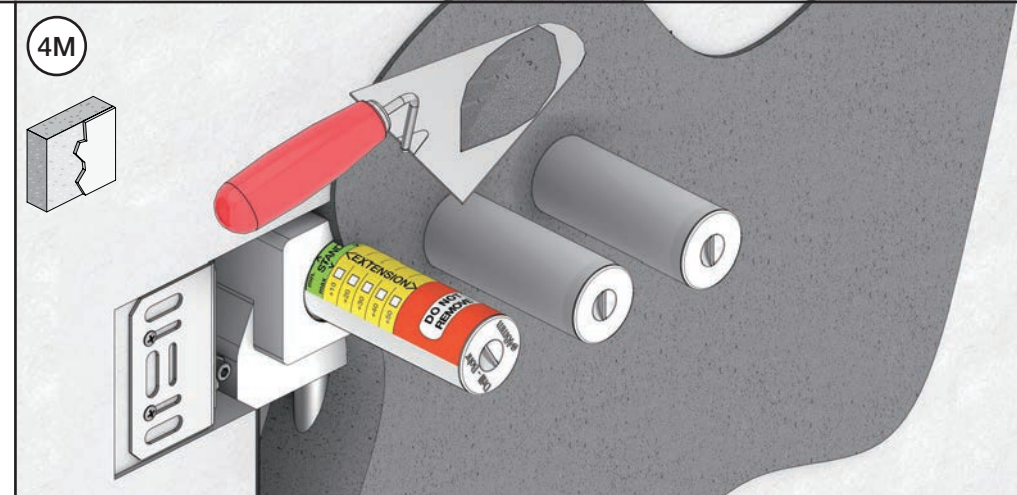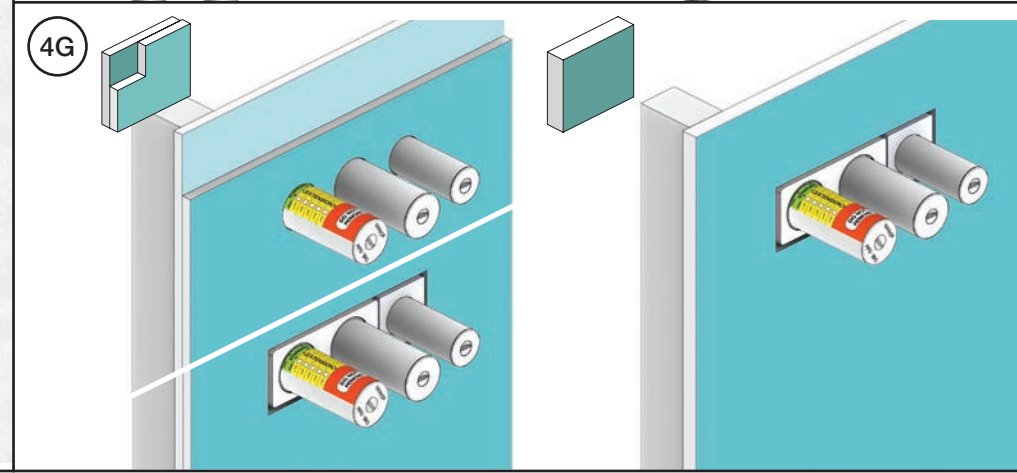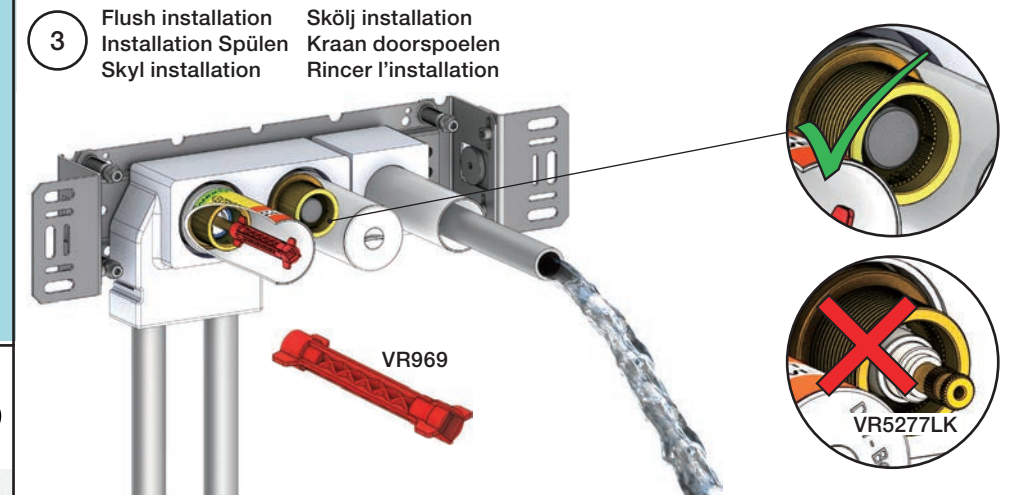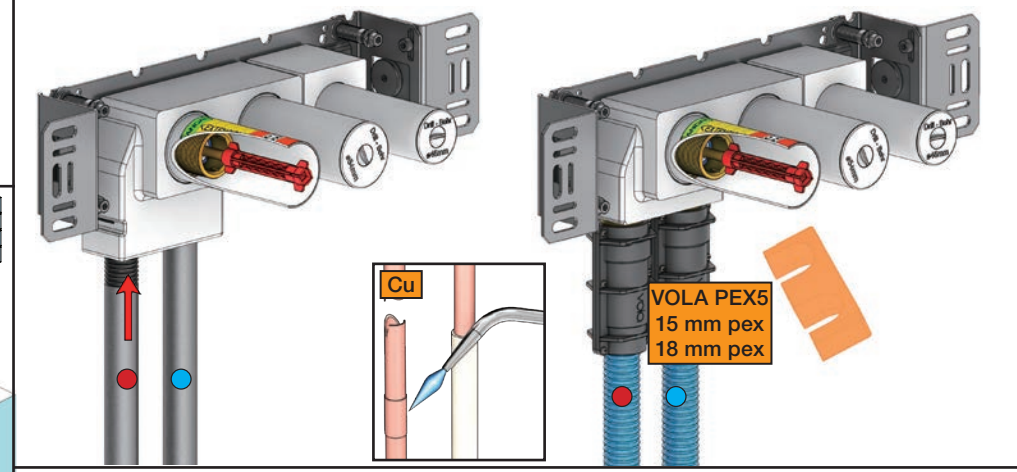



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.51:


1

NR.52+64:


2

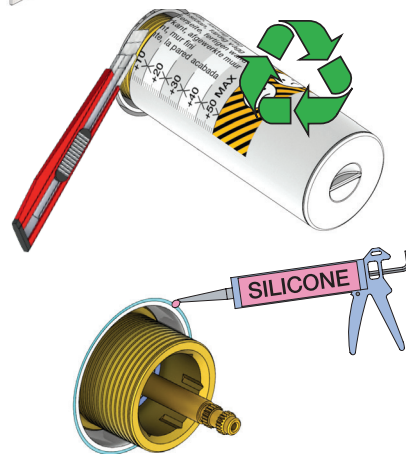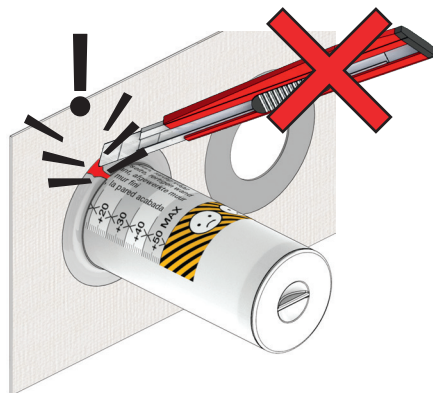

NR 51




NR 51 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm


NR 51 - 2

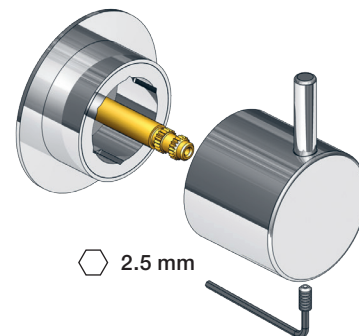


NR 52



NR 52 - 1



NR 52 - 2

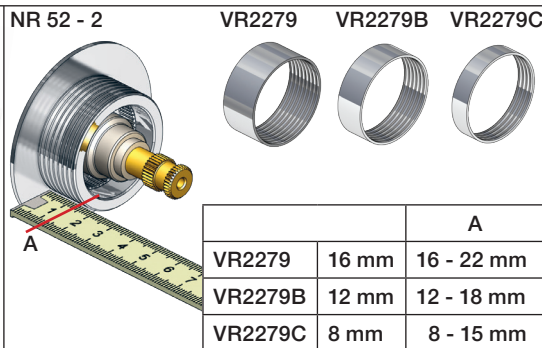


NR 52 - 3

Anti scald settings
Verbrühschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures




38°C
100°F


NR 52 - 4

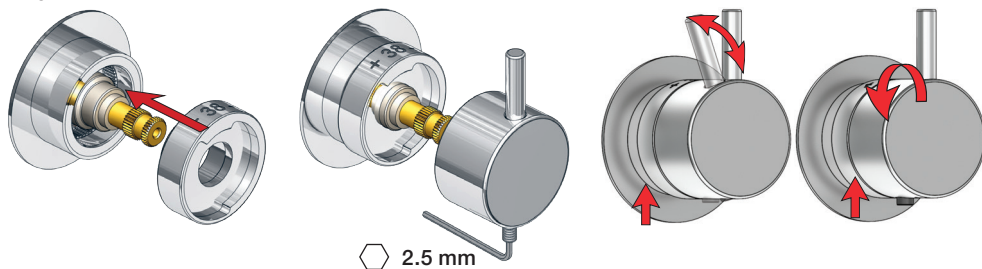


NR 64






NR 64 - 1

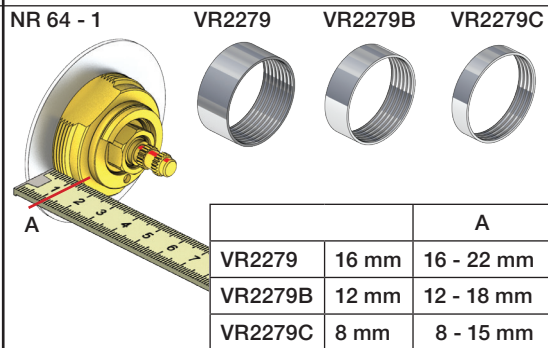

NR 64 - 2

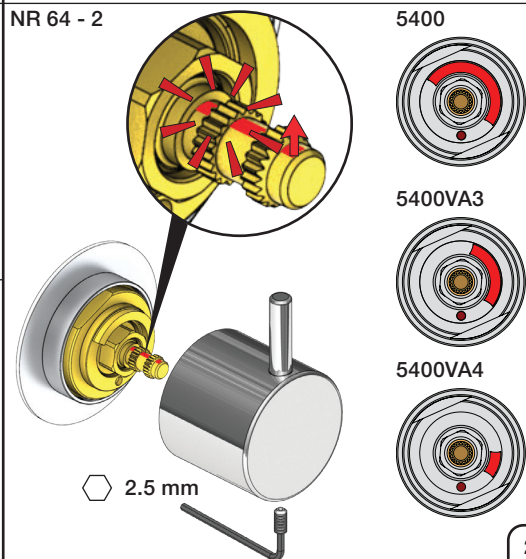

[illegible]

5400NV
5400TV

2930

5400DV



2934

5004B

5004L

3x2001, 001

3x2001, 001

©
2001



VOLA 5400V
5400FV, 5400NV
5400RV, 5400TV
5600V

Date
May 22

Rev.

Sheet
SB 10.54