


VOLA HV1E
VOLA RB1E

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



GODKENDT
TIL DRIKKEVAND

HV1E-19: 04/00333
HV1E-40: 04/00301
RB1E-19: 04/00332

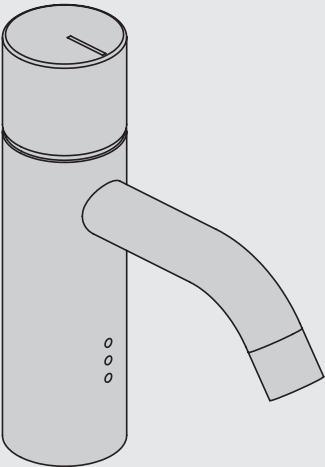

www.vola.com


HV1E/RB1E V8_40999861
18-04-2024



5 703182 372631

vola

HV1E/RB1E	L	H	h
Std.	114 mm 4 1/2"	150 mm 6"	56 mm 2 1/4"
/150	150 mm 6"	150 mm 6"	56 mm 2 1/4"
+170	114 mm 4 1/2"	320 mm 12 5/8"	227 mm 9"
+170/150	150 mm 6"	320 mm 12 5/8"	227 mm 9"

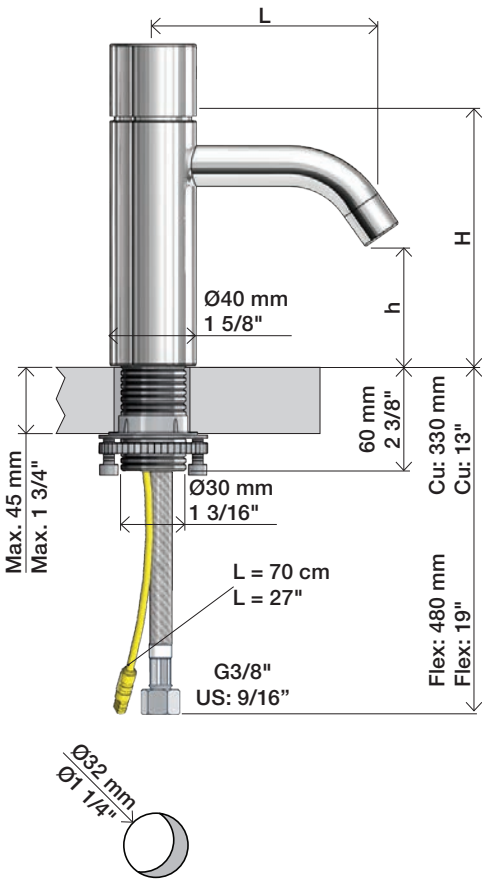



Data, 3 Bar:

Max.	l/min.	Gal/min.
HV1E:	5,0	1,3
RB1E	5,0	1,3




Max. 70°C, 158°F




1

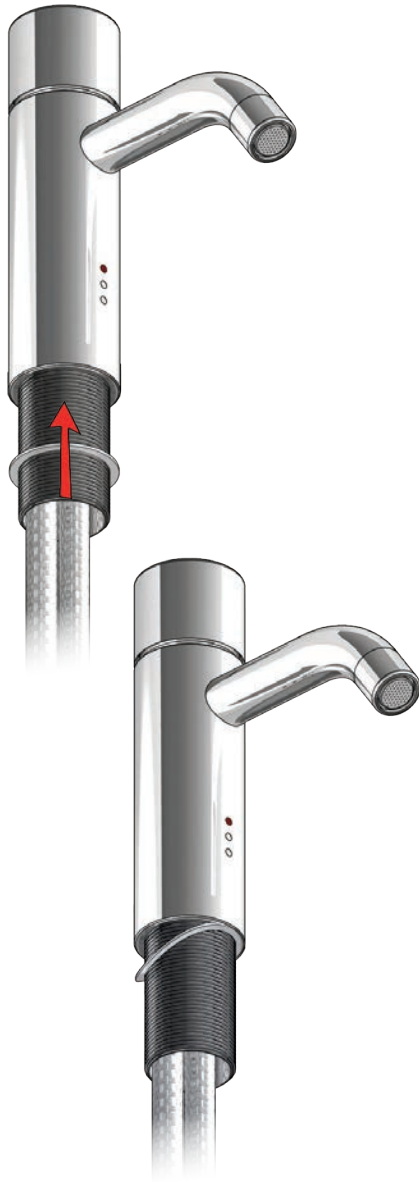

2

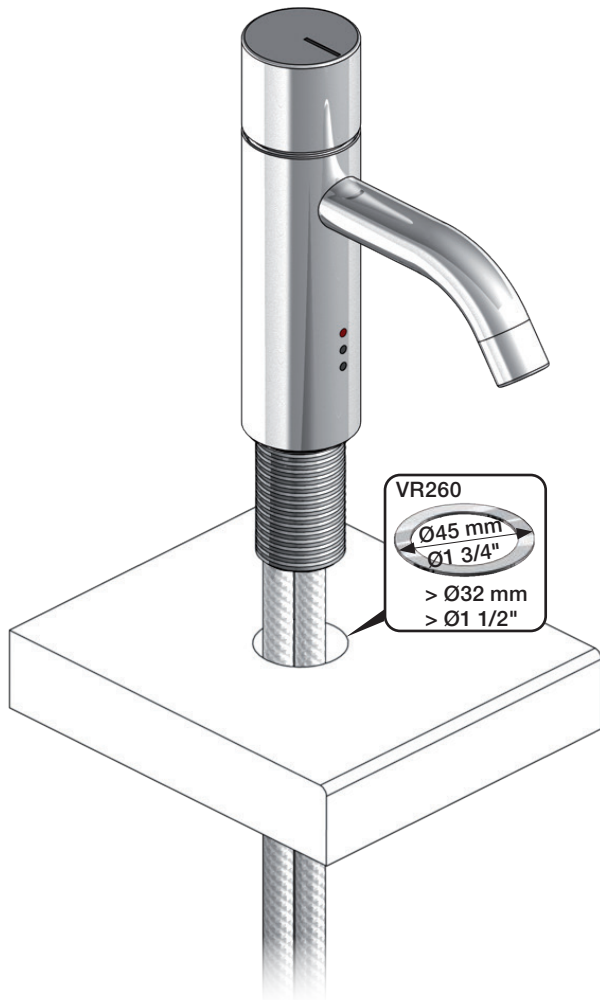

VR260
Ø45 mm
Ø1 3/4"
> Ø32 mm
> Ø1 1/2"

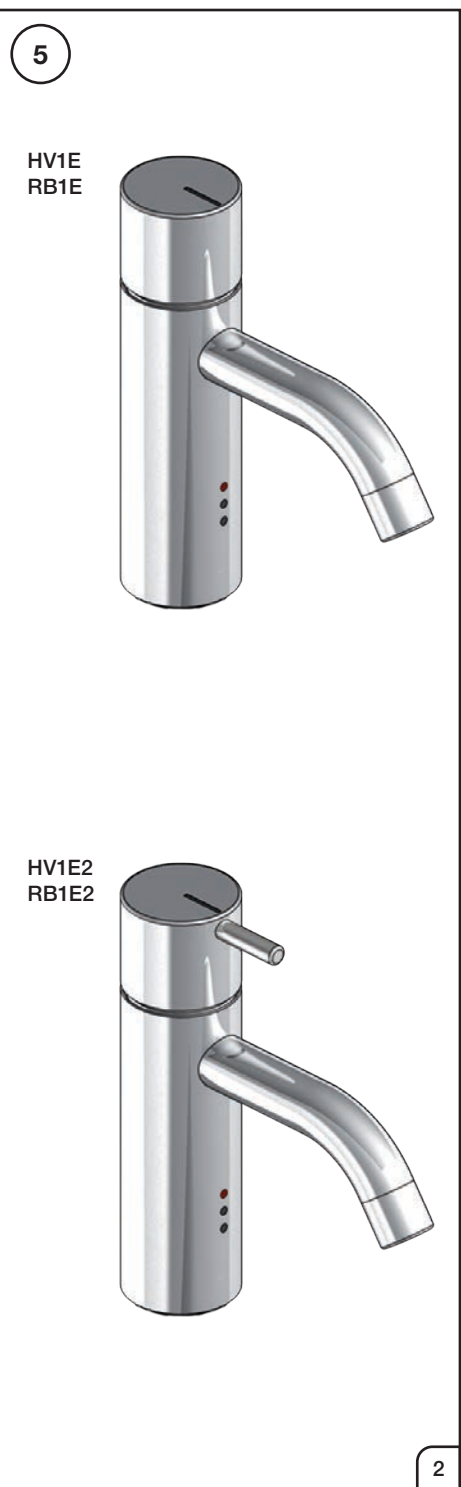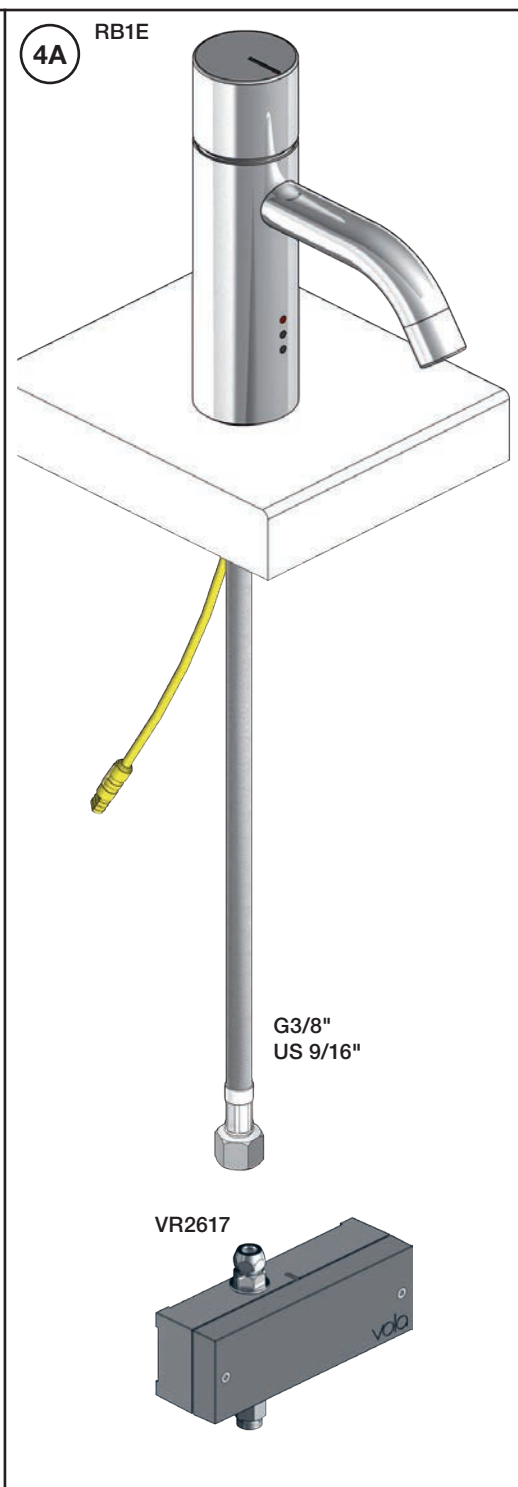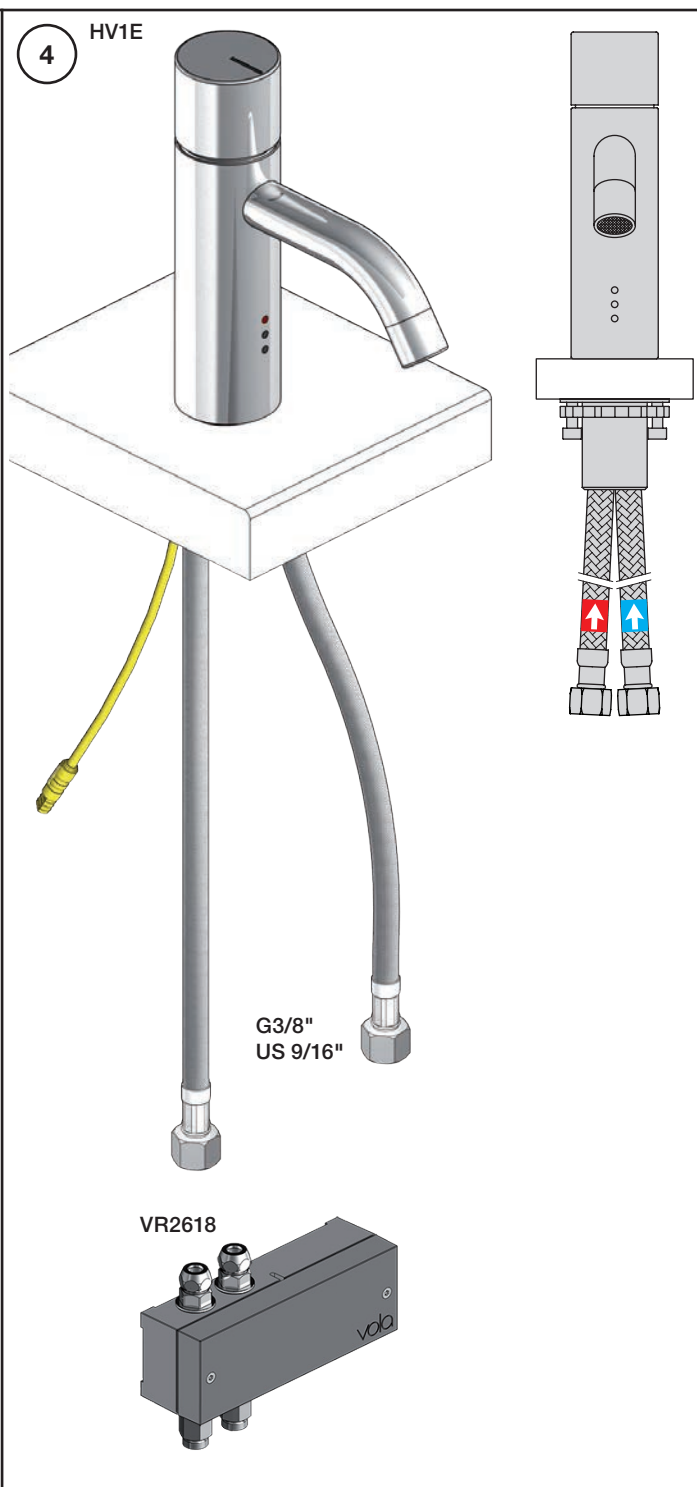

VOLA Electronic

Elektronikboks

Valve box

Ventil Kasten

Ventilbox


Ventiel doos

Boite étanche avec vanne




EU EMC directive
2004/108/EU
IPX4

VR2618



VR2617



www.vola.com

mnt_Elektronikbox_V10_40999840
17-03-2022

© VOLA A/S




vola

Settings: Einstellung:	Setting: Justering:	Afstelling: Réglage:			
	Sec.	1	2	3	4
DEFAULT SETTING:		ON	ON	ON	ON
ON	0	ON	ON	ON	ON = 20 sec. - hygienic rinse every 24h. - hygienische spülung jede 24 stunde. - hygiejneskyl 24t efter sidste brug. - hygienisk skölja varje 24 timmar. - hygiénisch spoelen iedere 24 uur. - Rinçage hygiénique chaque 24h.
OFF	3	ON	OFF	ON	
	5	ON	OFF	OFF	
	8	OFF	ON	ON	
	10	OFF	ON	OFF	
	15	OFF	OFF	ON	
	20	OFF	OFF	OFF	
SPECIAL: Long spout Lange Auslauf Langt udløb Långt utlopp Lange uitloop Long bec	*0	ON	ON	OFF	


installation requirements:
Installationsanforderungen:

Sunlight or light from halogen lamps can shorten the signal range.
Sonnenlicht oder Licht von Halogenlampen können das Signal verkürzen.
Skarpt sollys eller halogenlys, kan forkorte rækkevidden.
Starkt sollys eller halogenbelysning kan förkorta signalen/känsligheten.
Directe lichtinval van de zon of van halogeen lampen kan het signaal verkorten.
La lumière du soleil ou des lampes à halogène peut perturber le fonctionnement du détecteur.




Krav til installation:
Installationskrav:

No mirroring surfaces opposite the sensor.
Keine spiegelnden Flächen vor dem Sensor.
Ingen reflekterende overflader modsat sensoren.
Inga speglade ytor motsatta sensorn.
Geen spiegelen oppervlakken tegenover de sensor.
Pas de surfaces réfléchissantes opposées du capteur.



Adapter/ Adapteur VR2624 & VR2636

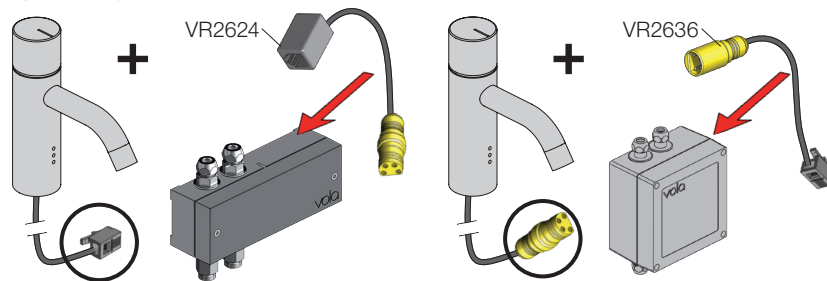

DC Power supply
DC Stromversorgung
DC Nätaggregat

DC strømforsyning
DC Nätaggregat

DC voeding
Alimentation électrique

VR2622: ROW & GB
 VR2626: EU
 VR2623, IPX5:

110 - 230V~/50-60Hz
 9V~/300 mA
 100 - 240V~/50-60Hz/130mA
 9V~/660 mA

VR2622-VR2623-VR2626
VR2624-VR2636:
 To be ordered separately
 Separat bestillen
 Bestilles særskilt
 Beställas separat
 Apart te bestellen
 À commander séparément

2 m

1 m

2 m

Battery operation
Batteriebetrieb


Batteridrift
Batteridrift

Batterij bedrijf
Fonctionnement sur batterie


2 x 1.5V AA - FR6 - FR6

Batteries **MUST** be removed if operated by Power supply.
 Batterien **MÜSSEN** bei Stromversorgung entfernt werden.
 Batterierne **SKAL** fjernes ved brug af strømforsyning.
 Batterier **SKAL** tas bort om der anvendes nätaggregat.
 Batterijen **MOETEN** worden verwijderd als ze op netvoeding werken.
 Les piles **DOIVENT** être impérativement retirées si on utilise l'alimentation électrique.

VR2618

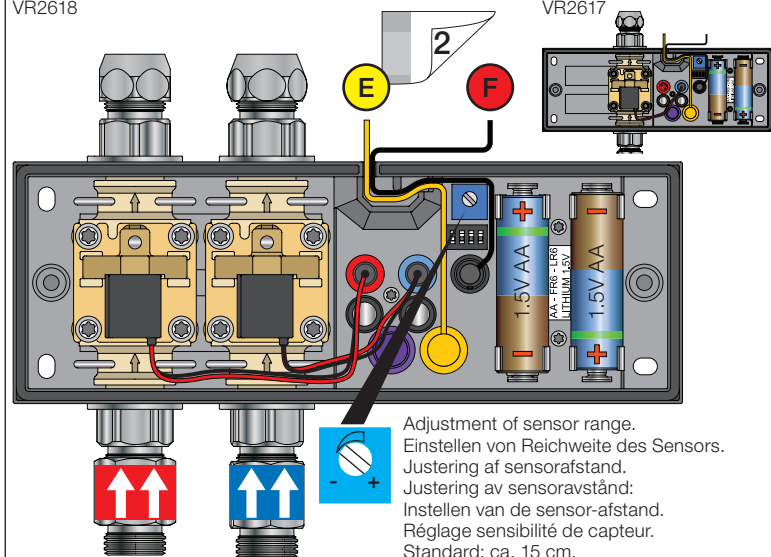


Adjustment of sensor range.
Einstellen von Reichweite des Sensors.
Justering af sensorafstand.
Justering av sensoravstånd:
Instellen van de sensor-afstand.
Réglage sensibilité de capteur.
Standard: ca. 15 cm.

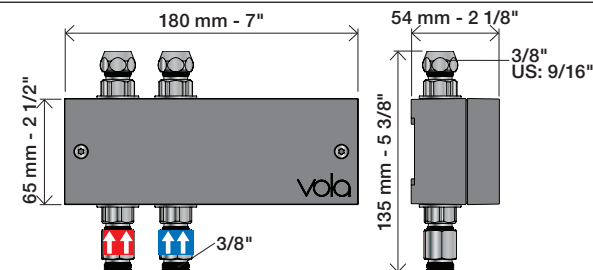


Technical drawing of a wall-mounted gas boiler unit. The drawing includes a vertical scale on the left with markings from 0 to 10. The boiler unit is shown in a side view, with a blue gas line and a yellow water line connected to it. A diagonal section on the right shows the internal components of the boiler, including a burner and a heat exchanger. The drawing is labeled with 'DIN 1946' and 'DIN 1947'.


Takmonterad
Plafondmontage
Monté au plafond

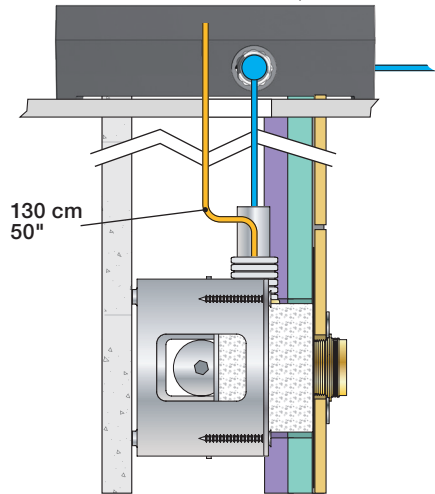


This technical drawing shows a side view of a wall-mounted gas valve assembly. The assembly consists of a main gas valve body mounted on a wall, with a pressure gauge connected to its side. A gas line enters the valve from the bottom. Two electrical wires, one blue and one yellow, run from the valve to a separate electrical control box mounted on the wall. The drawing includes dimension lines and labels for various components and measurements.

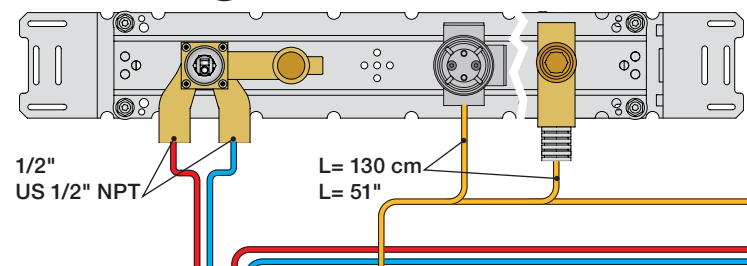


A

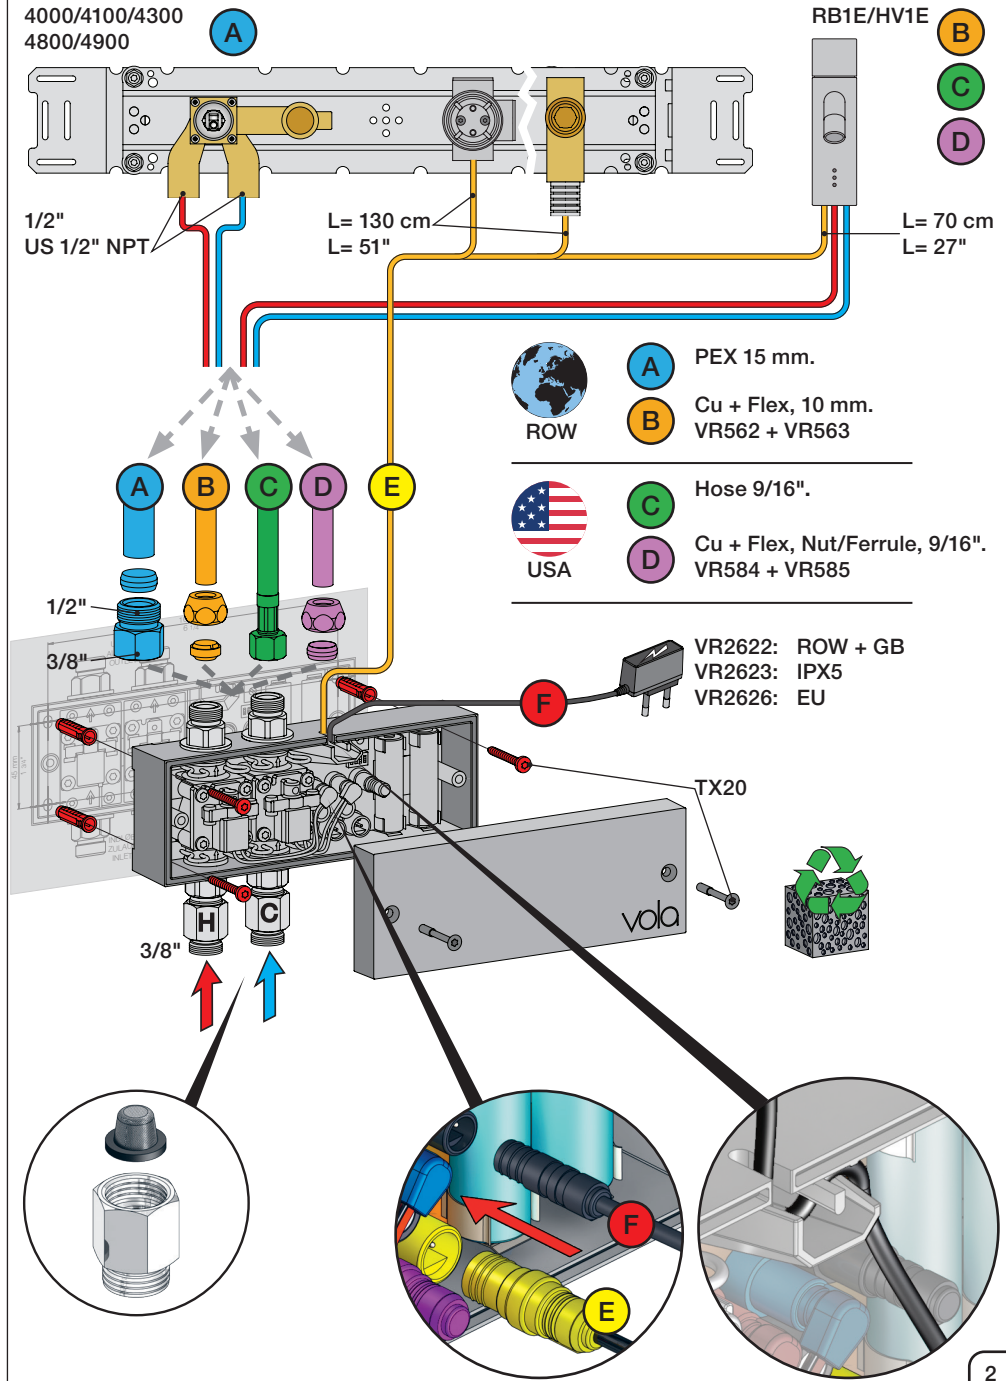


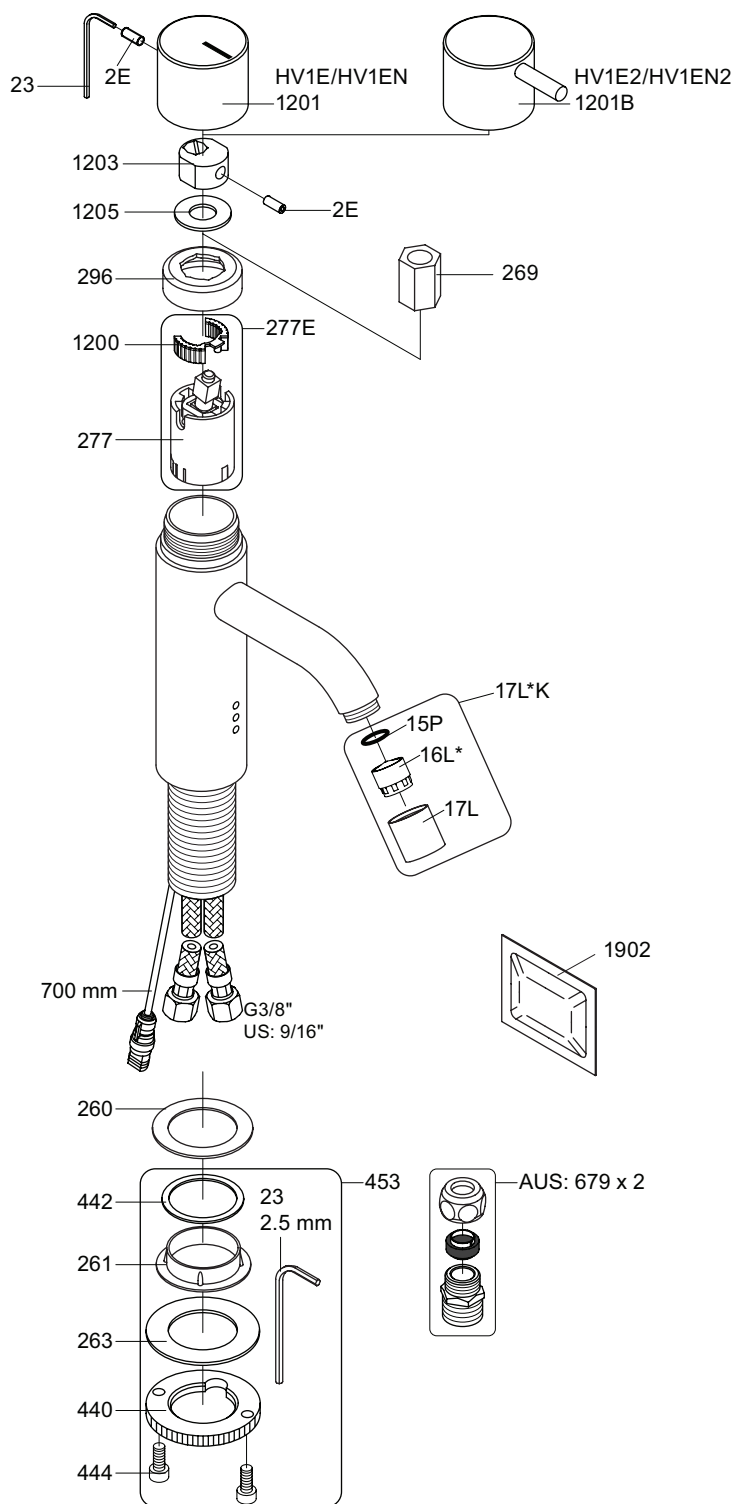

VR2618:



HV1: Ø10
 HV1JP: Ø10
 HV1US: Ø3/8"
 HV1Q: Ø3/8"



VR277E:	VR277, VR1200
* VR17L4K:	VR15P, VR16L4, VR17L (US-Standard)
* VR17L5K:	VR15P, VR16L5, VR17L (Standard)
* VR17L9K:	VR15P, VR16L9, VR17L (Japan Standard)
VR453:	VR23, VR261, VR263, VR440, 2xVR444
NR.12:	VR2E, VR23, VR1201
NR.12B:	VR2E, VR23, VR1201B



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com


HV1E Family:

HV1E: /150
 HV1E2: /150
 HV1EN: /150
 HV1EN2: /150
 HV1ET36: /150

Date
 Jan. 23

Rev.
 5

Sheet
 SB 21.10

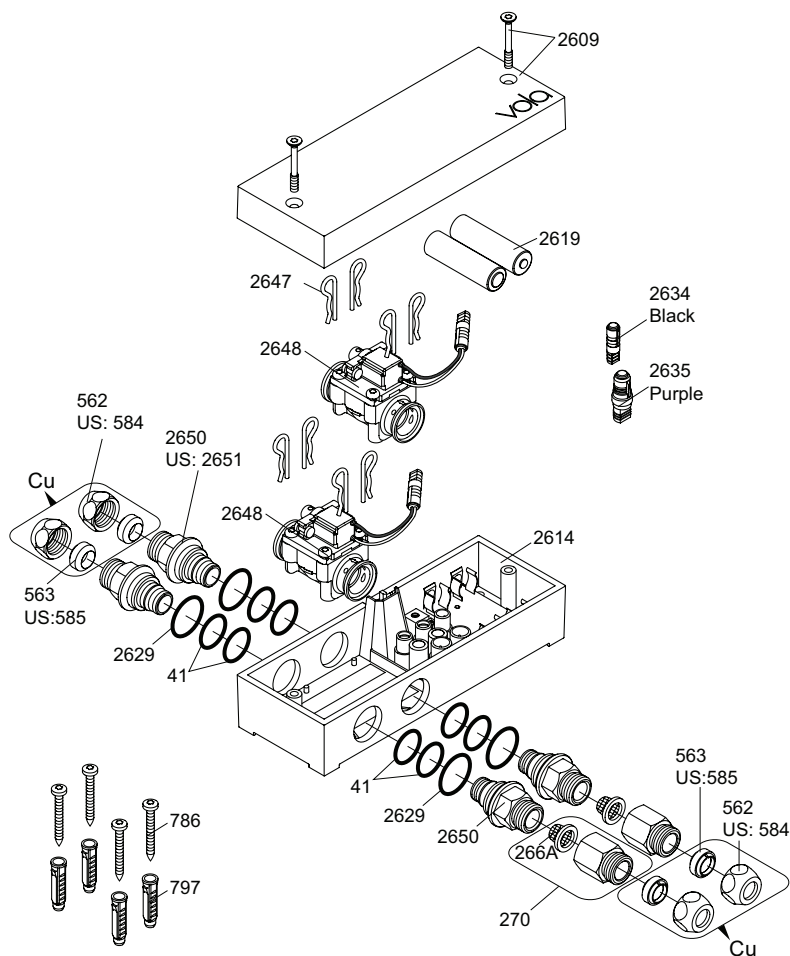

VR2650: 2xVR41, VR2652, VR2629
 VR2651: 2xVR41, VR2652, VR2629 (USA)
 VR2654: 4xVR2647, VR2648, 2xVR2650, 2xVR266A

Additional parts Zusätzliche Teile Supplernde dele Ytterligare delar

Extra onderdelen Pièces supplémentaires Las piezas adicionales

Remote control
Fernbedienung
Fjernbetjening
Fjärrkontroll

Afstandsbediening
Contrôle à distance
Telemando

2625




Power supply
Netzteil
Strømforsyning
Strömförsörjning

Stroomvoorziening
Alimentation
Convertidor adaptador



2622: ROW&GB
2626: EU

	EU	GB	US	AUS
Type:	C	G	A	I



2623: IPX5

Extension

2639 - 5 m
2645 - 10 m



Black
Schwarz
Sort

Svart
Zwart
Noir

Signal cable
Signalkabel

Signaalkabel
Câble de signal
Cable de señal




41XX, 49XX:

509 - 1.5 m
509A - 5 m
509B - 10 m



Yellow
Gelb
Gul
Gul
Geel
Jaune




RB1E, HV1E:
2656 - 1.5 m



247

US: 2601\$

Cu: 221:
Ø10 mm




L 500 mm

L 500 mm


L 350 mm

Adapter
Adapteur

Discontinued model
aufgehörte Modell
Udgået model
Avvecklad modell
Beëindigde model
Modèle discontinué




2624
L 200 mm




RJ10 - 4/4

2636
L 200 mm



RJ10 - 4/4



vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

**VOLA VR2618
HV1E/4100/4900**

Date:

Feb. 23

Rev.:

2

Sheet:

SB21.16